

**UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
SGUS0007Total Pages in this Submission
75**TO THE ASSISTANT COMMISSIONER FOR PATENTS****Box Patent Application
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

METHOD AND APPARATUS FOR PUSH AND PULL DISTRIBUTION OF MULTIMEDIA

and invented by:

**Lawrence A. Fish
Lowell E. Teschmacher
Anibal-Jose Rivero
Roswell R. Roberts, III**JC530 U.S. PTO
09/263801
03/06/99If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☒ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: 60/077,147

Which is a:

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Which is a:

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 53 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
SGUS0007

Total Pages in this Submission
75

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
a. ☐ Formal b. ☒ Informal Number of Sheets 14
4. ☐ Oath or Declaration
a. ☐ Newly executed *(original or copy)* ☐ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
c. ☐ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission *(if applicable, all must be included)*
a. ☐ Paper Copy
b. ☐ Computer Readable Copy
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & documents)*
9. ☐ 37 CFR 3.73(b) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
☐ First Class ☒ Express Mail *(Specify Label No.):* EE511634351US

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
SGUS0007

Total Pages in this Submission
75

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures *(please identify below)*:


Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	1	- 20 =	0	x \$11.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$41.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$380.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$380.00

- ☒ A check in the amount of \$380.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 13-0017 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 3/6/99

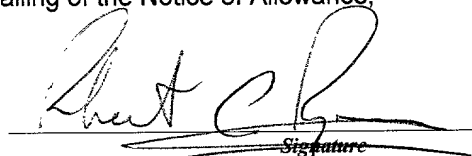
Signature

Reg. No. 29,343

775-686-5050

cc:

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27 (c)) - SMALL BUSINESS CONCERN**

Docket No.
SGUS0007

Serial No.

Filing Date

3/6/99

Patent No.

Issue Date

Applicant/

Patentee: Fish et al.

Invention: **METHOD AND APPARATUS FOR PUSH AND PULL DISTRIBUTION OF MULTIMEDIA**

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: StarGuide Digital Networks, Inc.

ADDRESS OF CONCERN: Suite 1510, 300 E. Second Street, Reno, Nevada 89509

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above identified invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed on the next page and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern or organization exists.
☐ each such person, concern or organization is listed below.

FULL NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME _____

ADDRESS _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: _____

Robert C. Ryan

TITLE OF PERSON SIGNING _____

OTHER THAN OWNER: _____

Executive Vice President

ADDRESS OF PERSON SIGNING: _____

95 Rimfire Circle

Reno, Nevada 89509

SIGNATURE: _____



DATE: 3/6/99

**IN THE
UNITED STATES PATENT AND TRADEMARK OFFICE
(Case No. SGUS0007)**

Title:

**METHOD AND APPARATUS FOR PUSH AND PULL
DISTRIBUTION OF MULTIMEDIA**

Inventors:

**Lawrence A. Fish
Lowell E. Teschmacher
Anibal-Jose Rivero
Roswell R. Roberts, III**

FIELD OF THE INVENTION

The present invention relates to the distribution of multimedia from one location to another. More particularly, this invention relates to the automated distribution of digital media, most preferably by 'pushing' media to receiving units and 'pulling' media from distributing units.

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation of applicants' co-pending provisional application, serial number 60/077,147, filed March 6, 1998, entitled METHOD AND APPARATUS FOR PUSH AND PULL DISTRIBUTION OF MULTIMEDIA, the disclosure of which provisional application is incorporated herein by reference.

BACKGROUND

There has long been a need for efficient methods and systems for distribution of differing types of media such as data, images, audio, or video information. In attempting to fulfill this need, a wide variety of types of systems have been developed, from manual systems such as postal and express physical delivery systems to digitized systems such as those built around wide area computing networks (WANs) and the Internet.

Manual systems suffer from a wide variety of problems, such as high cost, limited reach, unreliability, and time delay. The Internet and traditional e-mail types of distribution systems have become a much more omnipresent vehicle for distributing media, but the Internet presents significant problems for those seeking to reliably, efficiently, and quickly distribute digital media, particularly voluminous media files, to a variety of users.

In this regard, the Internet does presently support certain types of 'push' distribution and 'pull' distribution. Internet facilities such as traditional e-mail allow an Internet user to 'push' content out to many other Internet users (but usually not other types of users) through the Internet. Through the web and other facilities, the Internet allows Internet users (again, not others) to log onto web sites and 'pull' or download content from the sites. The Internet 'pull' model of distribution is unreliable and often quite untimely because it requires the receiving party to have access to the Internet and to initiate on its own the 'pull' or media download. Similarly, the Internet 'push' model of distribution is either: (i) unreliable and untimely because it does not accomplish any

delivery at all until the intended receiving party logs onto the Internet and retrieves the pushed e-mail content from the party's e-mail facility; or (ii) expensive if the 'push' model is made more reliable by a permanent connection to the Internet by all desired receiving parties.

Moreover, while the Internet can serve as an effective platform for distribution of relatively small e-mail messages to those who have corporate or educational LANs permanently connected to the Internet 24 hours per day, 7 days per week, the Internet is not effective when timing of the reception is important and the sending and receiving entities either do not both have access to the Internet or are not both on-line to send and receive when needed. The Internet also suffers from well known bandwidth and other constraints that make it difficult, and often impossible, to rely on the Internet to distribute large media files, such as those containing images, audio, or video, for use by others who must receive and use such files in a timely fashion.

One approach to solving the problem of distribution of digital media has been to develop private wide area networks ("WANs") independent of the public Internet. Examples of these types of systems include corporate WAN's and the private WAN audio distribution systems deployed by companies like Digital Courier International and Musicam Express. (See U.S. Patent No. 5,694,334 and the commonly-assigned co-pending application, Serial No. 08/705,797, filed August 30, 1996, entitled "Audio File Distribution and Production System"). These private WANs often consist of networks of (often specialized) personal computers linked through dedicated, private

telecommunications types of links in order to produce and distribute digital information and media from one computer on the network to another.

These types of prior art WAN's have limited reach since they usually are connected only to those users who have systems connected to the WAN. They also typically have required dedicated telecommunications connections for each machine on the WAN in order to assure accessibility of, and push distribution to, each machine on the WAN. They also typically have required use of substantial expensive proprietary or non-standard software systems in order to reliably distribute voluminous media information, particularly audio or video content, throughout the WAN.

In addition, these prior art systems have typically required deployment of many thousands of expensive, customized PC's for use by each receiving or producing entity on the WAN. These types of WANs have thus not only required huge expense and effort required to manufacture, deploy, and install the customized PC's to establish the WAN and to achieve the distribution sought by the WAN, but also inherently limited the ability to easily and economically upgrade the installed base of PC's and other networking equipment over time when hardware upgrading is required or advisable (as it so often is in the rapidly evolving field of personal computers and telecommunications).

BRIEF SUMMARY OF ASPECTS OF THE INVENTION

The applicants have developed an integrated and automated system and method for reliably distributing digitized media information (preferably any type of digitized media information whatsoever) to multiple recipients. The present system and method includes push distribution through terrestrial and/or extraterrestrial facilities with confirmation of delivery from the recipients, and a combination push-pull distribution by a contact with the intended recipient (preferably without incurring any substantial communication charges) and a responsive pull or downloading of information by the recipient, also with confirmation by the recipient.

The applicants' system and method also preferably includes pull distribution, independent of the push/pull, allowing intended recipients to call in on their own and then select and download information. The system and method further preferably includes an automatic fallback method of physically shipping information to intended recipients that have not confirmed receipt of the media information through the other push, push/pull, or pull methods.

The preferred system and method also provides that many of those connected to the system may be producers of content for distribution to others through the system. In this fashion, producers can also be recipients of content from others on the system.

The preferred system and method also includes local hubs or proxy servers for the collection of content locally and distribution of that content to others connected to the

hub, or to other hubs and their affiliated recipients. The system and method may also provide the ability to fax selected textual or graphic information to intended recipients.

The applicants' preferred apparatus and method also utilizes a flexible and powerful broadcast file transfer protocol for transfer of files through a one-way broadcast system, such as a one-way satellite system, into a TCP/IP (two-way) network.

These and other aspects of the present invention will become apparent as the specification proceeds. In this regard, it is to be understood that the scope of the invention is to be determined by reference to the claims and not to this Brief Summary.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

OBJECTS AND ADVANTAGES OF THE INVENTION

It is an object of the present invention to provide a reliable and automated system and method for distribution of media information or content.

It is yet another object of the invention to provide such a system that can be used to distribute audio or text for national radio broadcasters.

It is an advantage provided by the applicant's invention that the present system and method can reliably distribute any type of media -- data, images, audio, video, or multimedia.

Yet another advantage is that the present method and system can economically push content to recipients through efficient broadcast mediums such as satellite broadcasting systems.

A further advantage is that the present method and system provides confirmation of receipt to the party pushing or broadcasting the content.

A still further advantage is that the present method and system can also remotely activate intended recipients to perform a pull or download of content from the system, thus reducing or eliminating the need for continuous telecommunications connections typically required to push content to intended recipients, thereby also reducing or eliminating associated communication expenses.

An additional advantage it that the present method and system can allow recipients to independently pull permitted content whenever desired by the recipients.

Yet another advantage is that the present system works in conjunction with well established and widely available aspects of the Internet while not being dependent on the Internet to accomplish distribution of content, particularly high bandwidth content.

It is also an advantage of the present system and method to provide a fall-back manual system of delivery of content when all else fails or the intended recipient is not a part of the system.

Another advantage is that the present system and method allows the distributor and recipient to utilize or refrain from utilizing the Internet to accomplish distribution by, for example, accomplishing an extraterrestrial satellite broadcast to permissioned reception systems or by direct terrestrial connection independent of the Internet.

A related advantage is that the present system and method is very flexible and economical for both the system owner and operator and those who utilize the system to distribute content.

Yet another advantage is that the present system and method is easy to implement and does not require, or reduces the need for, costly hardware deployment or upgrades by the system owner or administrator over time.

An additional advantage is that the system and method can quickly, efficiently, and reliably distribute large, high bandwidth files, particularly audio or video files.

A related advantage is the ability of the system and method to broadcast files through a one-way broadcast network and feed the broadcast files into a two-way or TCP/IP network.

A yet additional advantage is that the present system and method also allows the distributor of the information to prioritize the information to be distributed in order to achieve the most economical distribution available in view of the prioritization, and to customize the contents of the package to reflect the identity and preferences of the sending party.

Another advantage of the present system and method is that those who use the system and method may readily, quickly, and economically access the central distribution management system to determine the nature and status of content provided to the management system for delivery to users.

Yet an additional advantage is that the producers and users of content may readily preview content produced or delivered to the user by the system and method.

There are many other advantages of the present invention. They will become apparent as the specification proceeds. It is to be understood, however, that the scope of the invention is to be determined by reference to the claims and not by whether a claimed embodiment necessarily achieves all the objects or advantages stated herein for the applicants' preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

The applicants' preferred embodiment is described in the following section and shown in the accompanying drawings wherein:

Figure 1 is a schematic view of the applicants' preferred method and system, showing use of a delivery server that automates the delivery of digitized content through satellite and terrestrial connections;

Figure 2 is a schematic view of the satellite transmission portion of the applicants' preferred method and system, showing use of the applicants' preferred StarGuide® satellite uplink and downlink/receiver-router;

Figure 3 is a schematic view of the envelope structure used by the applicants' preferred method and system, in order to package and deliver files through the system;

Figure 4 is a schematic view showing how data and files flow through the applicants' system on the delivery side of the system shown in Figure 1;

Figure 5 is a schematic view showing how data and files flow from the delivery server to the satellite uplink for broadcast through the satellite;

Figure 6 is a schematic view expanding on the functions of the delivery server shown in Figure 5 and showing how the delivery server also manages the delivery of data and files through terrestrial telecommunications connections and through manual delivery services;

Figure 7 is a flow chart showing how the Mailman and Traffic Cop routines run in the Mailroom application on the delivery server;

Figure 8 is a flow chart showing how the Mailroom application operates on the delivery server;

Figures 9 shows the sub-flow-charts, Validate, Verify, and Addressing, generally referenced and shown in Figure 8;

Figures 10 shows the sub-flow-charts, Sat, Forwarding, and Confirmation, generally referenced and shown in Figure 8;

Figure 11 is a depiction of the user interface for users running the applicants' system on the receiving or affiliate end;

Figure 12 is a depiction of the toolbar on the producer interface for producers of content for delivery through the applicants' system;

Figure 13 is a depiction of the Microsoft Explorer browser interface to provide information about content availability and delivery to users of the applicants' system and method;

Figure 14 is a lay-out of the client area in the browser interface of Figure 13;

Figure 15 is folder-tree structure for the tree area of the lay-out of Figure 14;

Figure 16 is a depiction of a sample appearance of the portion of the browser interface of Figure 13 for a user accessing the delivery tracking features on the delivery server; and

Figure 17 is a depiction of a sample appearance of the browser interface of Figure 13 providing a user with additional detail about packages delivered or to be delivered by the applicants' preferred system and method.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference to Figure 1, the applicants' preferred system and method generally consists of producer PC workstations, e.g., 12, 14, connected by two-way terrestrial telecommunications lines, e.g., 13, 15, to a delivery server, which is connected by a one-way satellite connection, generally 18, to satellite affiliate PC workstations, e.g., 20, and by two-way terrestrial telecommunications lines, e.g., 22, 24, 26, to both the satellite affiliates, e.g., 20, and general clients, e.g., 28, 30. The two-way communications lines, 13, 15, 22, 24, 26 may be POTS (plain old telephone system), ISDN, Frame Relay, xDSL, or T1 lines. The two-way communications lines 13, 15, 22, 24, 26 may connect to a terrestrial WAN (wide area network) 32, to which the delivery server 16 is also connected. The WAN 32 may consist of a private network (such as an intranet) or the public Internet.

The one-way satellite connection 18 provides a high-bandwidth vehicle for distribution of media files, particularly larger audio or video files, to affiliates, e.g., 20, and clients, e.g., 28, 30, such as radio or television stations. Because the satellite connection 18 is only a one-way connection, the connection 18 can suffer from link errors, lack of acknowledgement, and availability problems. As will be explained in greater detail below, the applicants' system and method thus also provides two-way connections 13, 15, 22, 24, 26 for confirmation of delivery and back-up telecom delivery. The system and method also includes a fall-back manual delivery facility automated delivery cannot be accomplished through the facilities shown in Figure 1.

With continuing reference to Figure 1, the delivery server 16 consists of six 400 MHz Pentium II IBM-compatible PC's (not shown), two of which constitute redundant file servers, two of which constitute redundant communications servers, and two of which constitute redundant system administration servers. The file servers (not shown) each have a 100+ GB hot swappable hard drive, and run Windows NT File Server. The communications servers (not shown) each have a telephone modem pool (TAPI compliant), an ISDN modem pool (TAPI compliant), and a T1 adapter, and run Windows NT Server. The system administration servers each have a 6GB hard drive and run Windows NT, POP3 Server, FTP Server, WWW Internet Server, Octopus real-time mirroring, and system software described in greater detail below. The file servers, communications servers, and administration servers are all interconnected on a 100 MHz Ethernet Local Area Network (LAN) 39, with standard Ethernet LAN cards mounted in each such server in a fashion well known to those of skill in the art.

The producers, e.g., 12, 14, preferably consist of an IBM compatible Pentium PC, with 4 GB of hard disk space, 64 MB of RAM, a color monitor, a mouse, a keyboard, 2 or more serial ports, an ISDN modem connected to an ISDN line, and DAC Card (by Musicam USA, Holmdel, New Jersey) or Digigram Card (with suitable driver for the particular card installed on the workstation), and stereo speakers. The producers also are loaded with off-the-shelf software such as Windows NT Workstation 4.0 or higher, Microsoft Internet Explorer 4.0 or higher, Microsoft Mail, and a TAPI compliant modem driver.

The producers, e.g., 12, 14, produce electronic, digital packages 34 of media information (not shown in Figure 1), which the delivery server 16 then stores and delivers to end-user satellite affiliates, e.g., 20, and clients, e.g., 28, 30, pursuant to instructions contained in the digital media packages 34. As will be explained below, the digital media packages 34 can include any type of digital media whatsoever, such as audio, video, text, hypertext, images, programs, data files (such as the addressing instructions or destination address list noted above or other data), etc. For example, for a radio broadcasting application, the package 34 will include one or more 30 or 60 second digitized audio advertisements (also called "spots"), a faxable instruction list, purchase order references, and an address list.

As will also be explained in further detail below, the delivery server 16 checks the contents of each digital package 34 and ensures that any value-added services required for the package 34 have been performed prior to forwarding the package 34 pursuant to the addressing instructions (not shown in Figure 1). The delivery server 16 thus checks to make sure that the digital package 34 includes an address list and all required contents for the package 34. When received by an affiliate 20 or client 28, 30, the affiliate/client user interface allows the user to display on the PC screen the packages 34 the affiliate or client 20, 28, 30 has received and their associated content, and to organize, preview, or otherwise utilized the digital media files contained within the packages. In the radio broadcasting application, for example, the affiliate or client 20, 28, 30 may play and broadcast the received audio content by merely clicking on the file indicator for the audio content, as explained below. The satellite connection 18 of the preferred embodiment is

shown in Figure 2. The delivery server's redundant file server, e.g., 36, maintains a file system 38 of packages or envelopes 34 and their associated media files. The file server 36 runs Broadcast File Transfer Protocol ("BFTP") service (explained below) and is connected by two-way TCP/IP connection 39 to a TCP/IP router 40, that supports IGMP version 2 multicasting. The router 40 is preferably a CPA 2503 router made by Cisco Corporation.

The multicast router 40 is in turn connected by a synchronous connection 42 to a StarGuide® VIF card in a StarGuide MX3® Multiplexer or Mux 44 (all StarGuide® products identified herein are available from StarGuide Digital Networks, Inc., Reno, Nevada, and San Diego, California). The output of the Mux 44 is fed through a satellite uplink 46, then through a third party satellite 48, and into a satellite downlink 50 in a fashion, and with additional associated equipment (amplifiers, modems, LNB's, etc. (not shown)) well known to those skilled in the art. The satellite signal is then fed from the downlink 50 into a pre-permissioned StarGuide II® Satellite Receiver 52 in a fashion well known to those skilled in the art. The Receiver 52 has a StarGuide® Ethernet Card (not shown). The StarGuide II® Receiver 52 thus demultiplexes the signal received from the satellite 48 and sends the IP portion of the signal (called a "service") to the StarGuide® Ethernet Card. In turn, the Ethernet Card provides TCP/IP IGMP multicast protocol output through a 10-Base-T Ethernet cable 54 to a satellite affiliate PC, e.g., 20. Preferably the TCP/IP uplink connection 38 and TCP/IP downlink connection 54 is an Ethernet network or similar connection, which are well known to those skilled in the art.

With this equipment, the envelopes and associated media files 34 may be broadcast efficiently by satellite to those StarGuide II® Receivers 52 pre-permissioned (through the StarGuide® NMS that controls the Mux 44) to receive the broadcast so that the affiliate PC's, e.g., 20, associated with each such permissioned Receiver 52 can receive and store the received envelope and associated media files 56 in a file system 58 on the affiliate PC, e.g., 20. In this regard, the BFTP protocol (explained below) ensures that the received envelope and media files 56 are identical to the transmitted envelope and media files 34.

With reference to Figure 3, the system 10 of Figures 1 and 2 actually delivers more than just envelopes, e.g., 34, with associated media files. The system actually delivers packages of information, e.g., 60, which include an envelope 61, the associated media or data files 62, and optionally a home HTML page 64 (which preferably includes the producer's logo or web-page indicia). The envelope 61 is an ASCII text file that includes a unique package identifier, a producer account identifier, a reference to the home HTML page, a listing of associated media files and logo, a client or affiliate address list, and other ancillary information such as date, priority, media file description, file code, and file size. The envelopes, e.g., 61, are through the terrestrial portion of the network or system 10 via common e-mail protocols such as the SMTP or POP3 protocols. As noted above, the envelopes 61 addressed for satellite affiliates are also broadcast over the satellite 48 using the BFTP protocol.

With reference now to Figure 4, a producer workstation, e.g., 12, includes third-party production tools 66 such as an audio encoder (preferably, a Musicam USA Dac

card, a Digigram card, or other MPEG software or hardware encoder), a video encoder, and a word processor. For audio and video files generated by the encoders, the resulting audio or video files have ISCI-identifiers, which are well known to those skilled in the art, and all the produced files, e.g., 68, 70, 72, are stored on the producer's hard drive 74. Through use of the producer packager software 76, an operator of the producer 12 utilizes standard Windows 95 or NT drag and drop tools to assemble the media files 68, 70, 72 into a package 60, such as shown in Figure 3 and described above. The operator of the producer workstation 12 preferably next selects the client or affiliate names from a global address list 78 (automatically downloaded to the producer 12 periodically by the delivery server 16) and also possibly from a private address list (not shown) stored on the producer 12. Addresses that are private and not global will receive packages and files by manual, not automated, delivery as described below. Whenever the operator addresses a package for delivery to an address that is not on the global list, the producer software warns the operator of the inability to send to that address other than by such manual means.

The packager application 76 adds the other information to the package 60 such as shown in Figure 3, and the operator of the producer workstation 12 may hit a "send key" (not shown) on the user interface for the application 76. This causes the packager application to queue the package 60 for immediate submission to the delivery server 16. A submitting or outbox agent 80 on the producer 12 then calls into the delivery server 16 via a two-way telecommunications line 82 supporting the TCP/IP protocol. Preferably the telecommunications line 82 is an ISDN or faster connection. The outbox agent 80

then utilizes the FTP protocol to transfer all media or data files, e.g., 68, 72, in the package 80 to the delivery server 16 and simultaneously e-mails the envelope for that package 80 to the delivery server 16. The producer 12 relies on its own production and Windows 95 or NT file management tools in order for any operator to delete media files generated by the producer 12.

With reference to Figures 4 and 5, the delivery server 16 runs, among other things, a mailman software agent 83, a traffic cop software agent 84, a satellite software agent 86, and web-site software 88. The mailman agent 83 continuously scans its software inbox 90 for envelopes, e.g., 60, submitted by producers (not shown in Figure 4). On detection of an envelope 60 in the inbox 90, the mailman agent 83 reads the envelope 60, determines the identity of the associated files 68, 72, and verifies that the delivery server 16 has received all files 68, 72 identified in the envelope 60, completed any value-added services for the envelope 60 or its associated files 68, 702, and stored them on a hard disk 91 on the delivery server 16. After all such files 68, 72 are stored on the hard disk 91, the mailman agent 83 e-mails the envelope 60 to all clients, e.g., 92, 94, 96 addressed in the envelope 60, according to addresses stored in a delivery addressing database 98 also stored on the delivery server 16. In the event that any client 92, 94, 96 is also a satellite affiliate 20 as explained above, the mailman agent 83 also submits the package 76 (i.e., the envelope 60 and its associated media files 68, 72) to the satellite agent 86, which queues the package 76 for repeated broadcasting over the satellite 48 to the satellite affiliates addressed in the envelope 60. As soon as the satellite agent 86

completes the satellite broadcast of the package 76, it flags the package 76 as sent to the satellite affiliate 20.

Referring again to Figures 4 and 5, in the event that either (i) any client 92, 94, 96 is not on the global address list maintained in a database 98 on the server 16, or (ii) the server 16 (i.e., the traffic cop agent 84) has not received confirmation of delivery from a given client, e.g., 92 or satellite affiliate within a predetermined time after receipt of the package 76 by the server 16, the mailman forwards the envelope 60 to a "duplication house" outbox on the server 16, for subsequent forwarding of the envelope 60 and its associated files 68, 72 to the duplication house for manual delivery to each such client or affiliate. Thus, the traffic cop agent 84 monitors its inbox 100 for e-mail confirmation, e.g., 102, 104, of the receipt of packages, e.g., 76, by the clients to whom the packages have been addressed as explained above. On receipt of such confirmation 102, 104, the traffic cop agent 84 updates the addressing and delivery database 98 with a confirmation of the delivery.

The server's web-site software 88 maintains a standard, Internet-accessible web site (not shown) via a modem pool and Internet connections (not shown) maintained on the server 16 in a fashion well known to those skilled in the art. The web-site provides authorized producers, clients, affiliates, and others (not shown) with the ability to log-in to the server web-site by use of an account number and password, and to view information about the status of their packages managed or delivered by the server 16. Standard web-site browser tools (such as the Microsoft Internet Explorer and Netscape Navigator) allow the producers, clients, affiliates, and other permitted users to view their

account and package delivery information on the server web-site, twenty-four hours per day, seven days per week.

The web-site software 88 provides the following search capabilities for those clients or affiliates who log into the web-site on the server 16:

- Search/sort by producer's purchase order number
- Search/sort by submission date
- Search/sort by server assigned package identification

As a result of the password protection on the web-site, those who access the site with their password are granted access to the site but only allowed to access information submitted by account associated with the password.

The server 16 also maintains the global address book for downloading of the address book to the producers, e.g., 12. This global book is updated automatically as new affiliates, clients, and producers register with the delivery server 16. The server 16 provides an on-line registration capability for affiliates or clients accessing the server web-site described above.

A clean-up or archiving process (not shown) may be added as a back office operation to allow an operator to delete or archive any envelopes, e.g., 20, that have expired according to the expiration date for the envelope. The clean-up process could also delete any media files that are not identified in any envelopes, e.g., 20, on the server 16.

The server 16 can also run a fax agent (not shown). The mailman can monitor document files in received envelopes to determine if any document is marked with a fax attribute, and for any such document, forward it to a fax server such as Microsoft

Exchange's fax service (not shown). The fax server then automatically faxes the document to the fax numbers requested in the envelope.

Referring now to Figure 6, the client or affiliate workstation runs affiliate software including a polling agent 108 that automatically places a phone call to the delivery server 16 at intervals or specific times set by the delivery server 16 or upon receipt of a "tickle" or triggering communication received from the delivery server 16. The tickle takes place by the server 16 dialing the phone number for the affiliate or client 20 in order to cause one or two telephonic rings to take place on the modem of the affiliate or client 20 through the two-way POTs or ISDN communication line, e.g., 22 of Figure 1. The affiliate or client modem (not shown) is set so that it will not answer with only two rings. A tickle monitor associated with the polling software 108, however, monitors the modem (through the Microsoft Telephone API (TAPI) facility) and recognizes the ringing or tickle, which causes the polling agent 108 to call the delivery server 16 (or any other alternative server (not shown) available to the affiliate or client), log-in to the server 16 (including by use of a unique and secure password), and pick-up any packages waiting at the server 16 (or alternative server, not shown) for delivery to the client or affiliate 20. In this regard, upon connecting to the server 16, the client or affiliate 20 exchanges any awaiting messages with the server 16 and, via its package list browser 109, checks its inbox 110 for any newly arrived messages or envelopes, 114, 116. Upon review of the newly received envelopes 114, 116 (including receipt of any such envelopes by satellite in the case of a satellite affiliate), the delivery agent (not shown) running in association with the browser 109 determines if any envelopes 114, 116

identify any packages or files that have not already been otherwise received by the client or affiliate 20 and stored on its hard disk 118. For any file not already present on the hard disk 118, the delivery agent requests and obtains an FTP transfer of the missing file from the server 16 to the client or affiliate hard disk 118 associated with the delivery agent. Upon automatic completion of these tasks and transfer of all envelopes and files addressed to the client or affiliate 20, the client or affiliate 20 hangs up automatically.

In this fashion, the server 16 accomplishes a combination push-pull of the package(s) for the client or affiliate 20. The 'push' takes place by tickling the client or affiliate 20 to inform it that the server 16 has content to deliver to the client or affiliate 20. The client or affiliate 20 then responds to the push or tickle by calling into the server 16 to pull the content from the server 16. The push takes place at no economic cost to the system and method, and with minimal effort. The pull and delivery of intended content to the client or affiliate 20 then takes place at the expense of the single phone call to the client or the affiliate 20 (unless otherwise arranged by the system administrators or users), with no need for any permanent or dedicated two-way connection between the server 16 and client or affiliate 20, and with a relatively high degree of security.

Whenever the delivery agent determines that the contents of a given package (as identified in the envelope for the package) are completely received by the client or affiliate 20, the delivery agent causes the client or affiliate 20 to take two additional actions. First, the client or affiliate 20 sends an e-mail to the server 16 confirming the delivery of the package to the client or affiliate 20. Second, the delivery agent flags all received packages, along with the packages' respective home-HTML information (64 in

Figure 3), for display to a user through the browser interface 109 at the client or affiliate 20.

The browser interface 109 on the client or affiliate 20 is based on the Microsoft Internet Explorer. As explained in greater detail below, the browser 109 provides a package hierarchy, inbox, and trash bin, and utilizes HTML for its package lists, so that received media files can be conveniently previewed, auditioned, or played.

Each server 16, producer 12, and client or affiliate 14 maintain substantial database information in addition to that already identified above. The server 16 maintains its database information in Microsoft SQL running on the server 16. The producers 12 and clients and affiliates 14 maintain their database information in the standard Windows 95 or Windows NT registry provided by the operating system on the clients and affiliates 14.

The data maintained in the server SQL database is as follows:

- Producer account
 1. Unique producer reference name
 2. Contact person at producer
 3. Producer billing address
 4. Producer fax telephone number
 5. Producer password
 6. Unique producer account number
- Client (or affiliate) account
 1. Unique client reference name
 2. Contact person at client
 3. Client shipping address
 4. Client fax number
 5. Client e-mail address
 6. Client communication line types (satellite, ISDN, POTs, Drop-ship)
 7. Delivery visibility: package type filtering (any package, audio-spot-packages, video-spot-packages, etc.) This field hides clients

from producers that do not generate packages of the type for the hidden clients.

8. Polling schedule

(Note that the Global Address Book is derived from this client-account information.)

- Package (identified from envelope submitted by a producer)
 1. Unique package identification
 2. Package subject (display name)
 3. Package type (generic, audio-spot-package, video-spot-package, etc.)
 4. Unique producer reference name
 5. Producer reference purchaser order number
 6. Submission time stamp
 7. Delivery priority (one week, two-day, next-day, two-hour, one-hour)
 8. Value added service options (manual addressing, media previewing, quality assurance, etc.)
 9. Delivery flag (value-added services completed, forward to satellite agent, forward to non-satellite clients, forward to all)
- Delivery Target Record (e-mailed from client as described above)
 1. Unique client reference name
 2. Unique package identification
 3. Delivery timestamp
 4. Delivery state (hold, submitted, forwarded, confirmed)
- Envelope (content submitted by producer via e-mail)
 1. Unique package identification
 2. Package subject (display name)
 3. Package type (generic, audio-spot-package, video-spot-package, etc.)
 4. Unique producer reference name
 5. Producer reference purchaser order number
 6. Submission time stamp
 7. Delivery priority (one week, two-day, next-day, two-hour, one-hour)
 8. Value added service options (manual addressing, media previewing, quality assurance, etc.)
 9. File list (filename and attributes)
 10. Address list (unique client identifications)

Note: Items 5-8 and 10 immediately above are not forwarded to the clients or affiliates. File attributes include date, size, CRC, unique reference name, and home-HTML.

- Client Tickle Record
 1. Unique reference name
 2. Tickle status (0=none, 1=to be tickled, 2=tickle succeeded, 3=tickle failed)
 3. Timestamp of last tickle status
 4. Status summary of last dial-in (e-mailed from client)
 5. Timestamp of last connection
- Log Message
 1. Unique client reference name
 2. Log timestamp
 3. Level (log, warning, error, fatal)
 4. Generation application
 5. Message

The database maintained by the client (affiliate) registry is as follows:

- Configuration
 1. Dial schedule (e-mailed to client from server)
 2. Line types: satellite, ISDN, POTs
- Package
 1. Envelope (see above)
 - A. Unique package identification
 - B. Package subject (display name)
 - C. Package type (generic, audio spot, video spot, etc.)
 - D. Producer name
 - E. File list (filename & attributes)
 2. Status flags (envelope received, media files in progress, media files complete, package viewed, package deleted)
 3. Display folder (default inbox, recycle folder schedules it for deletion)
- Folders
 1. Name (e.g., "Inbox" and "Inbox\Media World")
- Phone Book
 1. Primary server: phone number & line type (ISDN/POTs)
 2. Backup server: phone number & line type (ISDN/POTs)

The data maintained in the producer registry is as follows:

- Configuration
 1. Line types: satellite, ISDN, POTs
- Package
 1. Envelope (see above)
 - A. Unique package identification
 - B. Package subject (display name)
 - C. Package type (generic, audio spot, video spot, etc.)
 - D. Producer name
 - E. File list (filename & attributes)
 - F. Address list
 2. Status flags (envelope received, media files in progress, media files complete, package viewed, package deleted)
 3. Display folder (default inbox, recycle folder schedules it for deletion)
- Folders
 1. Name (e.g., "Inbox" and "Inbox\Media World")
- Phone Book
 1. Primary server: phone number & line type (ISDN/POTs)
 2. Alternate server: phone number & line type (ISDN/POTs)

Referring again to Figure 6, the delivery server 16 is able to generate a comprehensive list of packages, e.g., 76 that are to be manually shipped to clients or affiliates 20 that have not or cannot receive the package by satellite or by terrestrial (ISDN or POTs) connections. The delivery server 16 maintains an outbox 106 for the manual delivery service. The manual delivery service can log onto the server 16 to procure the list of packages, e.g., 76, for manual delivery and associated files for physical duplication of the file(s) for each package onto a physical media, such as a tape 116 or CD (not shown), for ground delivery 120 or other manual delivery such as by a combination of air express and ground delivery 120.

The mailman 83 and traffic cop 84 applications, as shown in Figure 6, operate according to the flow chart shown in Figure 7. These two applications 83, 84 monitor their respective inboxes 90, 100 to receive and process envelopes, e.g., 60, and status confirmations, e.g., 102.

Referring now to Figure 8, the delivery server 16 also runs a core mailroom application shown in Figure 8. The mailroom application consists of the processes shown in Figure 8 along with the sub-processes (validate, addressing, and verify) shown in Figure 9, and the sub-processes (satellite, forwarding, and confirmation) shown in Figure 10. In essence, the mailroom application processes and forwards, as shown in Figure 6, the envelopes, e.g., 60, and confirmations, e.g., 102, saved into the central database 98 by the mailman 83 and traffic cop 84 applications of Figure 7. The mailroom thus decides when, where, and how to forward packages, e.g., 76, to clients or affiliates, e.g., 20, as shown in Figure 6.

The tickle or tickler application referenced in Figure 10, and noted above, is a self-running application on the delivery server 16. When the delivery server 16 requires that a package must be picked up immediately by a client or affiliate 20, the mailroom agent on the server 16 submits a request to the tickler application to dial out and ring the specified client or affiliate. As also noted above, the client's tickle monitor detects the ring and dials out to the server 16 (or to an alternate server (not shown) which may be a local, Internet ISP, or other server of packages for the client) so that the client may pull its packages from the server as described above.

With reference to Figure 6, the affiliate or client 20 also runs a warehouse manager application (not shown) also noted above. The warehouse manager is the high-level communications server for the user interface of each client or affiliate 20. The warehouse manager manipulates the client database described above as directed by the client or affiliate through its graphical user interface (the "browser"). The warehouse manager thus maintains the package hierarchy, performs garbage collection and deletion of obsolete files, maintains the activity and error log, and notifies the client or affiliate browser of newly arrived packages.

Communications between the warehouse manager and client or affiliate graphical user interface take place through standard interprocess communications protocols such as TCP/IP and HTTP. The warehouse manager also runs a garbage collection process, which (i) removes expired packages after their respective kill or expiration dates, and (ii) purges the oldest media in the recycle bin, whether it has expired or not, as disk space lowers past a threshold.

The mailroom agent noted above is responsible for fetching packages using e-mail and FTP, tracking incomplete packages, and then adding the completed packages to the warehouse manager.

Still referring to Figure 6, each satellite affiliate 20 also runs a satellite agent application, called a BFTP receiver. This application saves all files that it receives from the satellite broadcast via the BFTP protocol explained below.

The producer and client user interfaces are similar. For example, with reference to Figure 11, the producer interface (not shown) appears much like the client interface

122 but with the toolbar 103 of Figure 12 rather than the client or affiliate toolbar 105 shown in Figure 11. The producer interface has:

1. a tree structure to organize folders and packages;
2. an “outbox” folder containing outgoing packages (see outbox 80 in Figure 4);
3. capability to create, delete, rename, and remove folders;
4. capability to delete and move packages;
5. a search and sort utility for packages;
6. a tool for previewing or auditioning media files (e.g., for playing an audio file through an audio card in the producer workstation);
7. an archiving agent that archives packages after their associated expiration dates;
8. a transaction log and word processing tool for viewing and printing the log; and
9. compatibility with Microsoft Explorer (preferably version 4.0 or higher).

As shown in Figure 13, the producer and client interface, e.g., 122 of Figure 11, occupy the central area 123 of the Microsoft Explorer browser interface on the producer. The central area 123 actually consists of three sub-areas: an HTML helper icon or toolbar sub-area 124, and tree sub-area 126, and a content sub-area 128.

With reference to Figure 12, the initial applications located in the helper sub-area 124 for the producer interface are:

1. **Packager:** provides the forms and facilities for creating a package prior to sending it. The following sections are included in the form:
 - packaging slip with purchase order number, package identification, producer name, subject of the package, and description of its contents;

5. Log: provides a log of all major transactions performed by the producer; the user may display and print a log filtered according to filters selected by the operator; and the operator may purge or archive the log;
6. Options: provides configuration election tools; for example, the operator may change the dialing properties or account settings for accessing the delivery server; and
7. Audio studio: a utility for playing, editing, recording, or viewing graphical display of, audio files; displays cut description, ISCI code of the cut, and duration of the cut. Preferably, this utility can convert WAV files to MPEG Layer II files by means of a software encoder on the producer.
8. Optional video studio: a utility for playing, editing, or recording video files.

Referring now to Figures 13 and 15, the tree control area 126 for the producer and client or affiliate user interface contains information generally of the type shown in Figure 15. More particularly, this basic tree structure contains:

1. an inbox for any packages on the workstation;
2. "trash" folders to move packages and media the user wishes to delete; and
3. a "saved" folder where the user may reorganize the packages.

The tree control provides the following functionality:

1. all packages are displayed in the producer or client or affiliate folder, and they are sorted;
2. items within a package cannot be deleted;

3. the user can move packages and media within a package from folder to folder by drag and drop;
4. clicking on an audio media file within a package triggers an audio player to play the audio through a sound card, such as Soundblaster card or professional quality Digigram card;
5. if the traffic instruction is a fax image, clicking on it triggers an image viewer to display the fax image;
6. a package can have any type of media within it; and
7. if a package is deleted from the “trash” folder, it is discarded from the workstation system.

The content area 128 shows detailed information about a selected tree branch in HTML form, as noted above. With regard to the example of shown in Figure 15:

1. if “home” is selected or clicked by the operator, the HTML display in the content area 128 show pertinent company information, such as the company logo for the operator of the particular producer workstation; and
2. if a particular package is selected, the displayed HTML shows the detailed description of the package and all of its contents;

Referring now to the affiliate or client user interface shown in Figure 11, this interface 122 appears when the affiliate or client application software is first booted or loaded by the operator of the affiliate or client workstation. This screen has four areas: toolbar 105, search criteria 130, media list area 132, and audio player area 134. The last

three of these areas all appear whenever the operator selects the inbox button on the toolbar 105.

Alternatively, the audio player may be deleted from the user interface of Figure 11 so that it is launched in its own, separate window or screen. In this fashion, any of a variety of generic audio players may be utilized without customization for insertion into the interface screen of Figure 11.

Referring again to the producer toolbar shown in Figure 12, this toolbar 103 includes packager 136 and tracking 138 buttons not present in the client or affiliate toolbar 105 of Figure 11. The packager button 136 launches that packaging wizard (not shown), and the tracking button 138 causes the delivery status of a package to be displayed in the content area 128 of the producer interface as shown in Figure 13.

Both the producer interface and the affiliate or client interface have the following features:

1. a new mail indicator provided by an animated inbox icon (content appearing to fall into the inbox); and
2. an error indicator provided by the logs button turning red when repeated attempts to connect to the delivery server 16 have failed.

Referring again to Figure 11, the search area 130 of the affiliate or client interface allows the operator to type in a search term and display, in the media listing area 132 a listing of all media files containing the search term in their respective titles, identifications of producer or advertiser, or ISCI codes. Through this search area 130, the operator may also choose to display certain types of media files, such as audio spots,

new spots, spots that have arrived in the last 24 hours or the last week, or spots that have been sent to the trash bin (which spots can then be recovered if still in the bin).

The search area 130 also contains an advanced button to allow the user to display advanced search options, such as a choice of the types of the content that should be listed. Thus, although the applicant's default button arrangement allows the user to view a list of audio spots only, the advanced buttons allow the user to display traffic instruction or other types of media file listings.

The media listing 132 depends on the options elected in the search area 130. For each item of audio content, e.g., 139, displayed, the list sets forth the title 140, advertiser 142, ISCI code 144, and arrival time 146. These items are displayed by title by default, but the user may sort these columns by clicking on the respective column header, e.g., 140, 142, 144, 146.

To the left of each item of content is an icon reflecting the type of content within the item (e.g., a CD for audio, paper for traffic instructions, etc.). New items not yet opened are in bold, and locked items also appear with a small padlock icon. A locked item is a media file that the affiliate or client user wishes to keep without the client's or affiliate's warehouse manager removing it to make space for new content. The client or affiliate can only lock files amounting to a total of ten percent of the client's or affiliate's entire hard disk space.

As with the tree control explained above for the producer interface, the user can load and play an audio item, for example, by double clicking on it. Right clicking on an item will provide a pop-up menu with options such as opening, locking, or deleting the

item, viewing properties for the item (including its title, description, ISCID code, and advertiser), showing the package in which the item arrived, etc.

The digital audio player 134 provides standard MPEG layer II record and playback features. Previous and next buttons may also be added for the audio player 135, and the player may include an additional button 135 to allow trim points to be manually programmed and saved with the audio spot.

Referring now to Figure 14, the inbox interface for a client or affiliate includes a toolbar area 150, an inbox area 152, a producer logo area 154 (when a particular package is selected), and a package media content area 156. The inbox area 152 thus lists all packages in the inbox for the client or affiliate, and the producer logo area 154 depicts the logo of the producer of the particular package selected in the inbox area 152. The media content area 156 shows the media files with associated icons depicting the nature of the content in the package, and the user may double click on each such media file or icon to view or play the associated file, depending on the nature of its contents.

Referring now to Figure 16, the web-site hosted by the media server 16 provides a package tracking interface 160 when a user dials in and logs onto the web-site or otherwise accesses the web-site interface through the Internet. After the user enters its account name and password, the package tracking interface presents a listing 162 of all packages submitted to the web-site by that user. The package tracking interface also provides filtering and sorting options. The listing 162 preferably includes the package identification 164, the user's purchase order number for the package 166, the status of the

package (delivered or awaiting delivery) 168, and the transaction time for any completed delivery 170.

Referring now to Figure 17, if the user or operator accessing the web-site on the server 16 then clicks on a given package identification in the listing 162 on the package tracking interface 160 as shown in Figure 16, the package detail report interface 172 appears for the particular package selected by the operator or user. This report 172 provides additional information about the status of a given package, such as affiliate confirmation details 174 the contents of the package 176.

ENVELOPES AND CONFIRMATIONS:

With reference again to Figures 1-6, envelopes generated within the applicants preferred system 10 are named: ENV.*pkgid*.TXT, where "*pkgid*" is a package identification that uniquely identifies a package across all producers. *Pkgid* is a long decimal value generated by the producer's package Wizard. The high-word of the package identifier is the unique producer identification. The low-word is a persistent incrementing counter (wraps after 32K packages).

The file format for envelopes is as follows:

ENVELOPE

ID: #*pkgid*

DATE: *yy/mm/dd hh:mm:ss*

ACCT: "*account*"

AD: "*advertiser*"

PO: "*workorder*"

SUBJ: "*title*"

DESC: "*description*"

FOLDER: "*folder*"

PRIO: [BEST/LOCALX/EXPRESS2/EXPRESS4/LOCAL/OVERNIGHT/TWODAY]

LIFE: *showtime,killdate*

FILE: "*filename*", "*title*", "*description*", "*iscii*", "*advertiser*", *filesize*, "*yy/mm/dd hh:mm:ss*"

ADDR: "account"[,"fullname","address","phone"]

Note:

- The ENVELOPE tag must appear first in the envelope. All other tags may appear in any sequence.
- All tags are separated by CR and/or LF (ascii 13 or 10). All tags are separated from data fields by a colon and a space pair. All data parameters are comma separated. Any data parameter that includes commas or spaces will be enclosed in quotes.
- Required tags appear in **bold**. When not supplied, the default value (an empty string) is assumed.
- *pkgid* is package ID that uniquely identifies a package across all producers. It's a long decimal value generated by the producer's packager Wizard. The high-word of the package ID is the unique producer dax ID. The low-word is a persistent incrementing counter (wraps after 32K packages).
- *account* is the short login account name, e.g. KROQ.
- *showtime* and *killdate* are timestamps derived from the C library call time() representing the number of seconds elapsed since Jan 1, 1970. A *showtime* values of 0 indicates package is displayed immediately upon arrival. A *killdate* of 0 indicates package does not automatically expire.
- One FILE tag should exist for each file. The *filesize* field is in bytes. The file timestamp is the last modification date/time of the file. The *filename* is a long filename augmented as follows:

media.TTTTTTTT-SSS.title.ext

home.pkgid.html
logo.daxid.title.ext

where *ext* is the file type (audio files will be .S48, logo images will be .BMP or .GIF, etc.)

where *title.ext* is the full filename as created or imported on the producer (pre-augmented)

where *TTTTTTTT* is the 8-character hexadecimal modification timestamp of the file

where *SSS* is the hexadecimal filesize in bytes

where *daxid* is the unique producer dax ID.

where *pkgid* is the unique package ID (in decimal) to which the HTML applies.

- One ADDR tag should exist for each recipient of the package. The *account* value represents the unique globally addressible account. If the recipient is from the private address book, full mailing information is provided with additional parameters.
- Special characters: CR/LF characters embedded within quoted data values are replaced with pipe character: |
- Envelope encoding: for the reasons of security and integrity, envelopes may be encoded with a proprietary encoding scheme specified later.

The specification for confirmations sent within the system 10 are named as follows.

CONFIRM.pkgid-account.TXT

Note:

- *pkgid* is package ID that uniquely identifies a package across all producers. It is a long decimal value generated by the producer's packager Wizard. The high-word of the package ID is the unique producer dax ID. The low-word is a persistent incrementing counter (wraps after 32K packages).
- *account* is the short login account name of the confirming affiliate (not the producer of the package), e.g. KROQ.

The file format for confirmations is as follows:

CONFIRMATION

ID: *#pkgid*

ACCT: *"account"*

DATE: *yy/mm/dd hh:mm:ss*

Note:

- The above message is e-mailed by recipients (clients or affiliates) back to the delivery server mailman after the package has been completely fetched. The tags are described in the envelope specification.
- The date represents the local date/time the affiliate or client completed picking up the package.
- The *account* is that of the confirming affiliate or client (not the producer of the package).
- A package addressed to N online affiliates or clients causes N confirmation messages to be returned and processed by the mailman.

BFTP:

The purpose of Broadcast File Transfer Protocol (BFTP) is to reliably transmit binary files over a one-way broadcast satellite network from an uplink server to one or more downlink clients. The BFTP protocol includes a means of group addressing such that the file will be received and stored only by those target sites (affiliates) included in an address list.

In order to address target sites, each site is provided a unique numeric identification. This identification is a 32-bit numeric value in the range 1- 4,294,967,295 (providing over 4 million unique identifiers). 0 is reserved as a broadcast identification.

Each affiliate identification is stored (in encoded format) in the affiliate registry and may be programmed through an affiliate configuration form. This affiliate identification is independent and unrelated to the satellite receiver's permissioning identification.

With reference to Figure 2, the BFTP data flows through a satellite system as follows:

- 1) The BFTP server 36 scans for packages 34 and prioritizes the files referenced therein for transmission.
- 2) The BFTP server 36 breaks files down into headers and records that are sent out a Ethernet card (via UDP packets) in the BFTP server 36 onto the LAN router 40 administering the LAN connection between the BFTP server 36 and TCP/IP router 40. Headers describe the file being sent and list the target addresses. Records contain the file data.
- 3) The router 40 outputs a synchronous stream into a service port on the StarGuide® MX3 Multiplexer 44.
- 4) The Multiplexer 44 aggregates this data stream with other services that are fed into the uplink system and transmitted to the various StarGuide® II Receivers, e.g., 52.
- 5) A StarGuide® Ethernet Card (not shown) is mounted in each Receiver 52 for each satellite affiliate 20. This StarGuide® Ethernet Card faithfully sends the TCP/IP packets that entered into the uplink's router 40, onto a LAN 54 fed by the StarGuide® Ethernet Card in the StarGuide® II Receiver 52. The StarGuide® Ethernet Card connects to the LAN 54 through a built-in 10-base-T (RJ45) connector.

- 6) The BFTP affiliate agent (not shown) running on the affiliate workstation filters the headers and records and saves them to the file system 58 all files targeted to the affiliate 20.

The BFTP protocol operates as follows:

The BFTP protocol breaks a file down into BFT Headers and BFTP Records. The headers describe the file and list the target addresses. The records contain the file data.

Each of these records is defined as set forth below in C++ programming language:

```
//WWW.XXX.YYY.ZZZ
#define MAX 128           //max file name length
typedef byte IPADDR[4];   //TCP/IP address

//File transfer info (note: count ID entries should follow)
typedef struct {
    word version;          //BFTP_INFO structure version (initially 0)
    char filename[MAX];    //ASCII filename transferred (path not included)
    dword timestamp;       //modified timestamp (GMT)
    dword filesize;        //total size of file (bytes)
    word framesize;        //size of each data portion of the BFTP record
    (bytes)
    word crc64;            //32-bit file CRC
    dword transID;         //identifying transaction
    IPADDR sendaddr;       //identifying target group (IGMP group address)
    word count;            //count of target addresses (0 if broadcast)
} BFTP_INFO;

//File transfer info (note len data follows)
typedef struct {
    dword transID;         //identifying transaction
    dword fpos;            //offset into file
    word len;              //data length (should be fixed framesize field in
BFTP_INFO)
} BFTP_DATA;

//special commands (T.B.D.)
typedef struct {
    word cmd;              //command identifier
```

```

    dword param;    //data associated with the command
    word len;    //data length (when parameters follow this structure.  Ususally 0)
} BFTP_COMMAND;

```

The BFTP_INFO structure describes the target filename and its attributes through the first three fields. Through the *sendaddr* field, the server is informed of the affiliates to whom the file will be transmitted. The *transID* field uniquely identifies a file transmission. The *count* field identifies how many 32-bit affiliate identifications follow the BFTP_INFO structure. Each affiliate identification uniquely identifies a receiving unit, and is stored after the header as a DWORD.

The BFTP_DATA structure contains the file data. The record's *transID* field identifies the file transaction to which this record applies. This field is used to match BFTP_DATA's with BFTP_INFO's. The data itself follows the BFTP_DATA.

UDP packet sizes are limited in most systems to 1500 bytes. For the most part, BFTP_INFO records sets the *framesize* field to 1024 (bytes per BFTP_DATA data). Likewise, exactly 1024 bytes of data are appended to all but the last BFTP_DATA. The last record's *len* field and data are truncated down to as many bytes as necessary to complete the file.

The UDP packet is limited to 1500 bytes. The BFTP_INFO header's structure requires 146 bytes, leaving 1354 bytes for the address list. Since each address list requires 4 bytes, a BFTP_INFO supports up to 338 addresses. If a file is to be delivered to more than 338 clients, then the addresses may be spread over multiple BFTP_INFO records. As an example, if a file is to be delivered to 2000 target addresses, then those

addresses may be sent using 6 BFTP_INFO records containing identical file and transaction information.

The BFTP server utilizes IGMP group addressing to send records and headers to groups of affiliates. IGMP (Internet Group Multicast Protocol) is an extension to the TCP/IP protocol suite and is similar to UDP. Before the standardization of IGMP, the TCP/IP protocol supported broadcast and targeted packet addressing. That is, packets can be sent to every target address, or to only one target address at a time. Using IGMP, target clients may "join" a logical group IP address. When the server sends a packet to this group address, all clients that joined the group receive the packet. All other clients ignore the packet. Clients "drop" from the IGMP group whenever a transaction is closed (aborted or successful). From transmission to transmission, only the transaction identification remains constant, not the IGMP group.

The server assigns a new IGMP group address per file transaction. IGMP address ranges are from 224.0.0.0 to 239.255.255.255. This range allows for 248,720,625 group addresses. However, unlike internet TCP/IP addresses, IGMP group addresses are not licensed, reserved addresses. To avoid the probability of an address conflict, exactly one IGMP address, 230.10.10.0, is reserved as the "broadcast" channel to which all affiliates listen. The BFTP_INFO packets are thus sent over this channel. The *sendaddr* field of this record, which identifies the group address to which the associated BFTP_DATA packets are sent, range from 239.255.0.0 to 239.255.0.255. Thus, transactions reuse the 255 group addresses. Both the reserved control IGMP address (239.255.0.0) and the file-

transaction IGMP address range (239.255.0.0--239.255.0.255) are reprogrammed through the registry. TCP/IP transmission port, also programmable, is 4000.

After the BFTP server selects a file to transmit, it composes an address list from all of the envelopes that reference the file. It generates a BFTP_INFO packet specifying the file and listing the target addresses. This packet is output from the server 16 as a UDP packet, which is faithfully broadcasted by the satellite system to the affiliate network. This packet is sent to the control IGMP address. After every BFTP_INFO transmission, the server 16 idles for a configurable period (e.g., 4 seconds) to allow the BFTP affiliates to process or discard the header.

Every BFTP client then "joins," or becomes a member of, the control IGMP address group. Thus, all BFTP affiliates "listen" for BFTP_INFO packets. On receiving a BFTP_INFO packet, the affiliate scans the address list for its own identification. If the affiliate finds its identification, then it begins its new transaction by creating the empty file in its default directory. The affiliate also joins the IGMP address group specified in the BFTP_INFO's *sendaddr* field. On joining the group, the affiliate listens for the BFTP_DATA records associated with the BFTP_INFO.

The BFTP affiliate processes multiple file transactions at a time simply by listening to multiple IGMP addresses. The TCP/IP protocol stack blocks all UDP packets sent to IGMP address groups that the affiliate has not joined. However, the affiliate receives all BFTP_INFO and BFTP_DATA packets it listens to over the same TCP/IP socket. Therefore, as each BFTP_DATA is received, the affiliate matches it with a BFTP_INFO transaction. The BFTP_DATA is usually received in order and the

transaction IGMP address range (230.10.10.0--230.10.10.255) are reprogrammed through the registry. TCP/IP transmission port, also programmable, is 4000.

After the BFTP server selects a file to transmit, it composes an address list from all of the envelopes that reference the file. It generates a BFTP_INFO packet specifying the file and listing the target addresses. This packet is output from the server 16 as a UDP packet, which is faithfully broadcasted by the satellite system to the affiliate network. This packet is sent to the control IGMP address. After every BFTP_INFO transmission, the server 16 idles for a configurable period (e.g., 4 seconds) to allow the BFTP affiliates to process or discard the header.

Every BFTP client then "joins," or becomes a member of, the control IGMP address group. Thus, all BFTP affiliates "listen" for BFTP_INFO packets. On receiving a BFTP_INFO packet, the affiliate scans the address list for its own identification. If the affiliate finds its identification, then it begins its new transaction by creating the empty file in its default directory. The affiliate also joins the IGMP address group specified in the BFTP_INFO's *sendaddr* field. On joining the group, the affiliate listens for the BFTP_DATA records associated with the BFTP_INFO.

The BFTP affiliate processes multiple file transactions at a time simply by listening to multiple IGMP addresses. The TCP/IP protocol stack blocks all UDP packets sent to IGMP address groups that the affiliate has not joined. However, the affiliate receives all BFTP_INFO and BFTP_DATA packets it listens to over the same TCP/IP socket. Therefore, as each BFTP_DATA is received, the affiliate matches it with a BFTP_INFO transaction. The BFTP_DATA is usually received in order and the

transaction matches the last received BFTP_INFO record. Dropped packets and packet retransmission is commonplace in satellite transmission, however. Thus, the affiliate's BFTP_DATA processing algorithm is optimized for the common case (proper reception) and accounts for the latter (dropout).

The affiliate can process up to 32 files at a time. For each transaction in progress, the affiliate maintains an opened file and a "File Bitmask" to record which records have been received. Each bit of the bitmask represents one data record of 1024 bytes (as related in *framesize* field). The size of this bitmask varies with each file transaction and has a filesize of 1024 bytes. For example, to receive a 1-megabyte file, the affiliate processes a bitmask of 128 bytes. Since the overhead to maintain the bitmask is only 0.01% of the file size, this bitmask may be kept in memory, or for exceptionally large files (over one gigabyte), the bitmask which can exceed 128 kbytes may be cached into a temporary file.

For each BFTP_DATA packet received, the affiliate marks the record's representative bit in the bitmask. When all of the data records have been received, the affiliate completes the transaction and saves the file into the affiliate's file system 58. Any gaps in the bitmask represent a dropped packet, which can be received on the next transmission.

On the BFTP server's next transmission of the same file, the affiliate ignores the BFTP_DATA records it has already received. Once all missing BFTP_DATA records are received, the affiliate drops out of the IGMP session, closes the file as complete, performs a final 32-bit CRC, and matches the value to the precalculated CRC provided in

the header. If the CRC does not match, the affiliate discards the file, since at this point, the affiliate cannot determine which record was corrupted. When the affiliate detects a packet out of sequence or a "gap," it writes zero-data into the file to fill in the gaps. When the missing packets arrive, the affiliate writes the correct information into those gaps. When the affiliate receives a BFTP_INFO structure, the affiliate:

- A) scans for its identification to determine if it should receive the file, and if so:
- B) checks to see if it is already processing the file transaction. If so it will ignore the transaction. If not, the affiliate:
- C) scans the directory to see if it has received the file already (compared by filename, filesize, and timestamp). If so, again it will ignore the transaction. If not, then the affiliate:
- D) creates and opens the file with the specified name, determines how many BFTP_DATA records it will receive, and allocates and initializes a file bitmask.

The time it takes the affiliate to scan the header's address list, scan its own transactions, abort outstanding transactions, and create the file is the reason the server will pause for a few seconds after each BFTP_INFO header is transmitted.

The following conditions should be taken into consideration for the receive algorithm.

- Errors in transmission of the BFTP_INFO and BFTP_DATA records are filtered out by the TCP/IP protocol, so received records will not be corrupted. However, the affiliate should drop packets with unexpected version identifiers or when the received packet length does not exactly match the expected packet length

- If the BFTP client receives a BFTP_INFO record in which the transaction identification matches a currently opened transaction but the filename does not match the filename in progress, then the old file is deleted and the transaction aborted. The new BFTP_INFO record is processed as usual.
- If a BFTP_DATA record is received and the transaction is not opened, the BFTP_DATA record is ignored.
- Transactions that are opened for more than 24 hours are aborted and the associated files deleted.
- If the BFTP_INFO record specifies a file that exists but the file size does not match, then the existing file is deleted and overwritten with the new file.
- Transactions are kept open by the affiliate because it could not receive the entire file the first time. If the affiliate begins a new transaction but it has reached its limit of 32 for open transactions, the affiliate aborts, and deletes the associated file of, the oldest transaction. The BFTP server sends files in their entirety. The BFTP server simultaneously transmits two files at a time when long form programs are put on hold for short spot delivery.
- An IGMP address can be shared between transactions. It is the transaction identification that uniquely identifies a transaction. If the affiliate receives two BFTP_INFO records with same IGMP address, both transactions continue undisturbed.
- If the affiliate is rebooted, all transactions in progress are aborted. Each file is saved into a temporary name until it is received in its entirety, when it is renamed to its

final, usable name. If the machine is rebooted, then when the affiliate resumes, it automatically deletes all of the temporary files because they represent transactions that cannot be resumed.

The BFTP server frequently retransmits files and file header information. The BFTP server transmits a file twice in its entirety before lowering its retransmission priority. Furthermore, for every 100 BFTP_DATA records transmitted, the server retransmits the transaction's BFTP_INFO record. This adds under 2% overhead to the file transmission for files over 100 kbytes. However, this allows BFTP affiliates that missed the initial BFTP_INFO record due to satellite downlink errors to join the transaction midway through the process. Thus, on the second transmission of the file, there is a greater likelihood that much of the file will already have been received.

The standard 32-bit CRC calculated on each file uses the following CCITT polynomial (represented in hexadecimal as 0xEDB88320):

$$X^{32} + X^{26} + X^{23} + X^{22} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X^1 + X^0$$

The delivery server's mailman agent submits files (and address lists) to the BFTP server for transmission. Submitted files are prioritized (or sorted) by four criteria: transmit count, due date, submit date, then filesize. When a file is first submitted, its transmit count will be 0, and so it will have highest priority. If 10 files are queued for first-time delivery, then the file that is to be delivered sooner will be transmitted first. If those files all have the same due-date, then the file submitted first is sent first. As a result, packages of files submitted at the same time with the same due-date tend to be delivered together to complete a package.

Once a file is transmitted, its transmit count is incremented, so freshly submitted files will have higher priority. However, if no new files are queued for transmission, the file with the lowest retransmission count will be sent next. A file remains queued by the BFTP server until one-day past its due date.

It is to be understood that the foregoing is a detailed description of the applicants' preferred embodiment. The scope of the applicants' invention, however, is to be determined by reference to the following claims.

CLAIMS

What we claim is:

1. A system for distribution of digital media information to one or more recipients, the system comprising in combination:

- A. a media server;
- B. a plurality of affiliates located remotely from the media server;
- C. a one-way broadcast system to which the media server is connected and into which the media server can deliver information for broadcast to one or more affiliates;
- D. a two-way connection between the media server and plurality of affiliates; and
- E. a confirmation application running in connection with each affiliate and being adapted to provide confirmation of receipt of the information by the affiliate to the media server through the two-way connection; and
- F. a delivery application running in connection with the server in order to re-send the information to an affiliate in the absence of receipt of confirmation from the affiliate of its receipt of such information.

ABSTRACT

The present specification discloses a multimedia distribution system and method. The system and method has a producer workstation, a delivery server, a high-bandwidth one-way satellite transmission system, a terrestrial two-way communication system (including use of the Internet), a plurality of satellite affiliate workstations, and a plurality of terrestrial client workstations. The delivery server receives digital information (envelopes and associated media files) from the producer workstations for delivery of the information to the affiliate and client workstations addressed in the envelope. The affiliate and client workstations provide the delivery server with confirmation of delivery of each received envelope and its associated files. In the absence of receipt of confirmation of delivery, the delivery server re-sends the unconfirmed envelope and associated files to the non-confirming affiliate or client workstation by a two-way terrestrial connection or by a manual system, such as a dub-and-ship service. The delivery server has the ability to push content to affiliates, push-pull content to affiliate and clients, to conventionally pull content from the delivery server, and push the content to affiliates and clients by manual delivery services. The disclosed system and method utilize a unique envelope and addressing protocol and a unique broadcast file transfer protocol for distribution to affiliate workstations by one-way satellite broadcast. The disclosed system and method

also make significant use of the TCP/IP, IGMP, and Ethernet protocols and information distribution techniques.

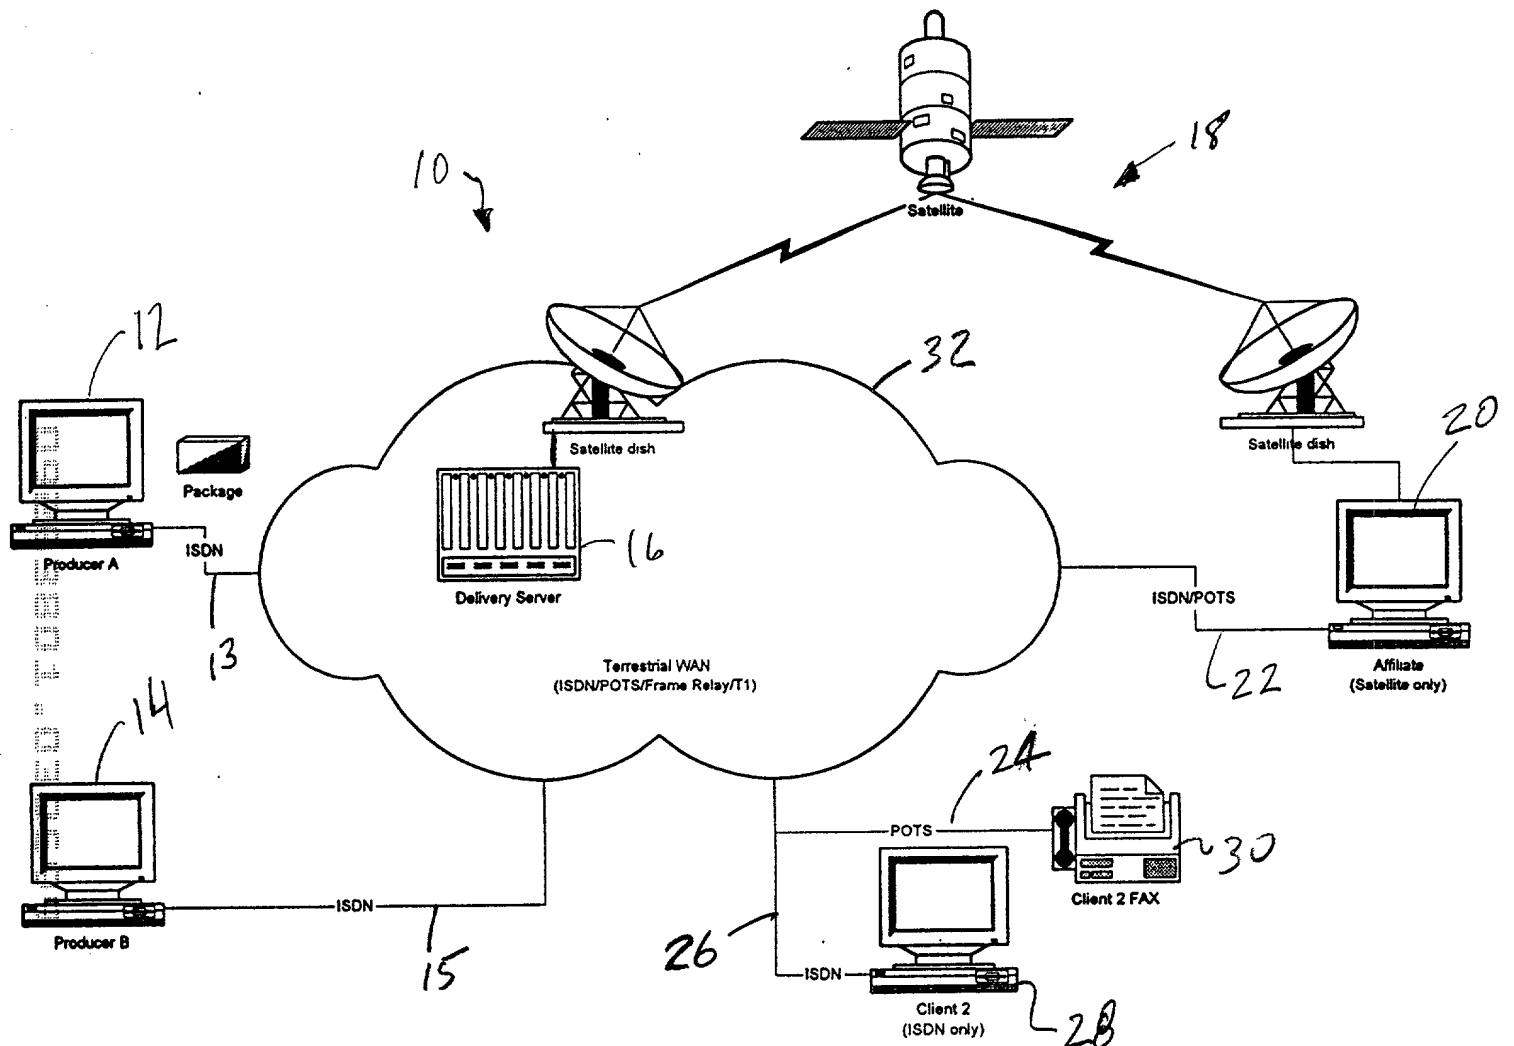


Fig. 1

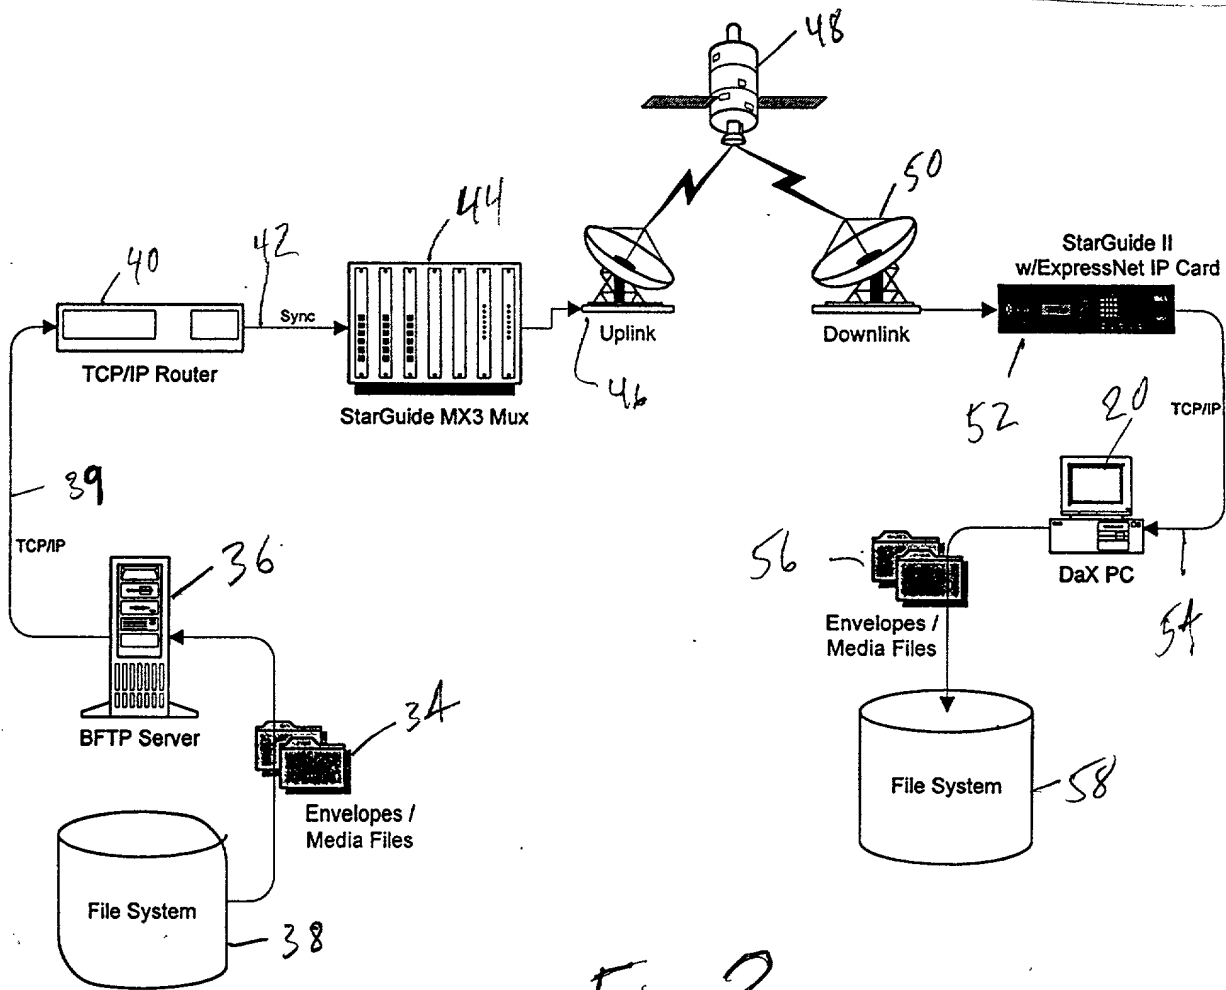


Fig. 2

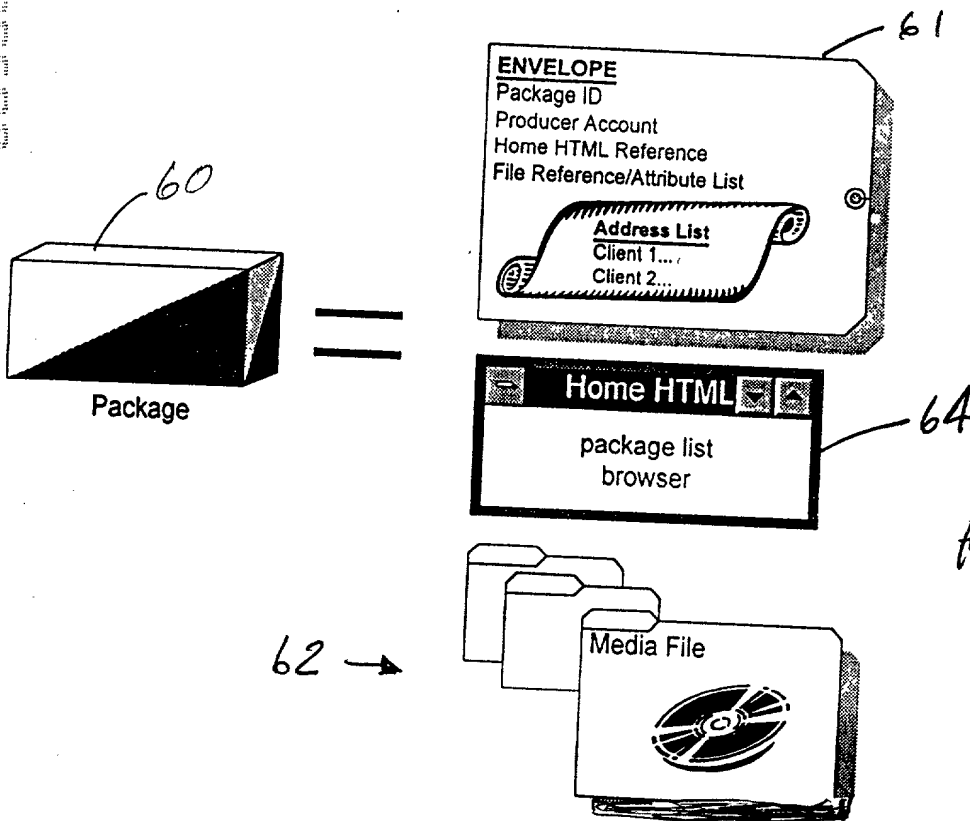
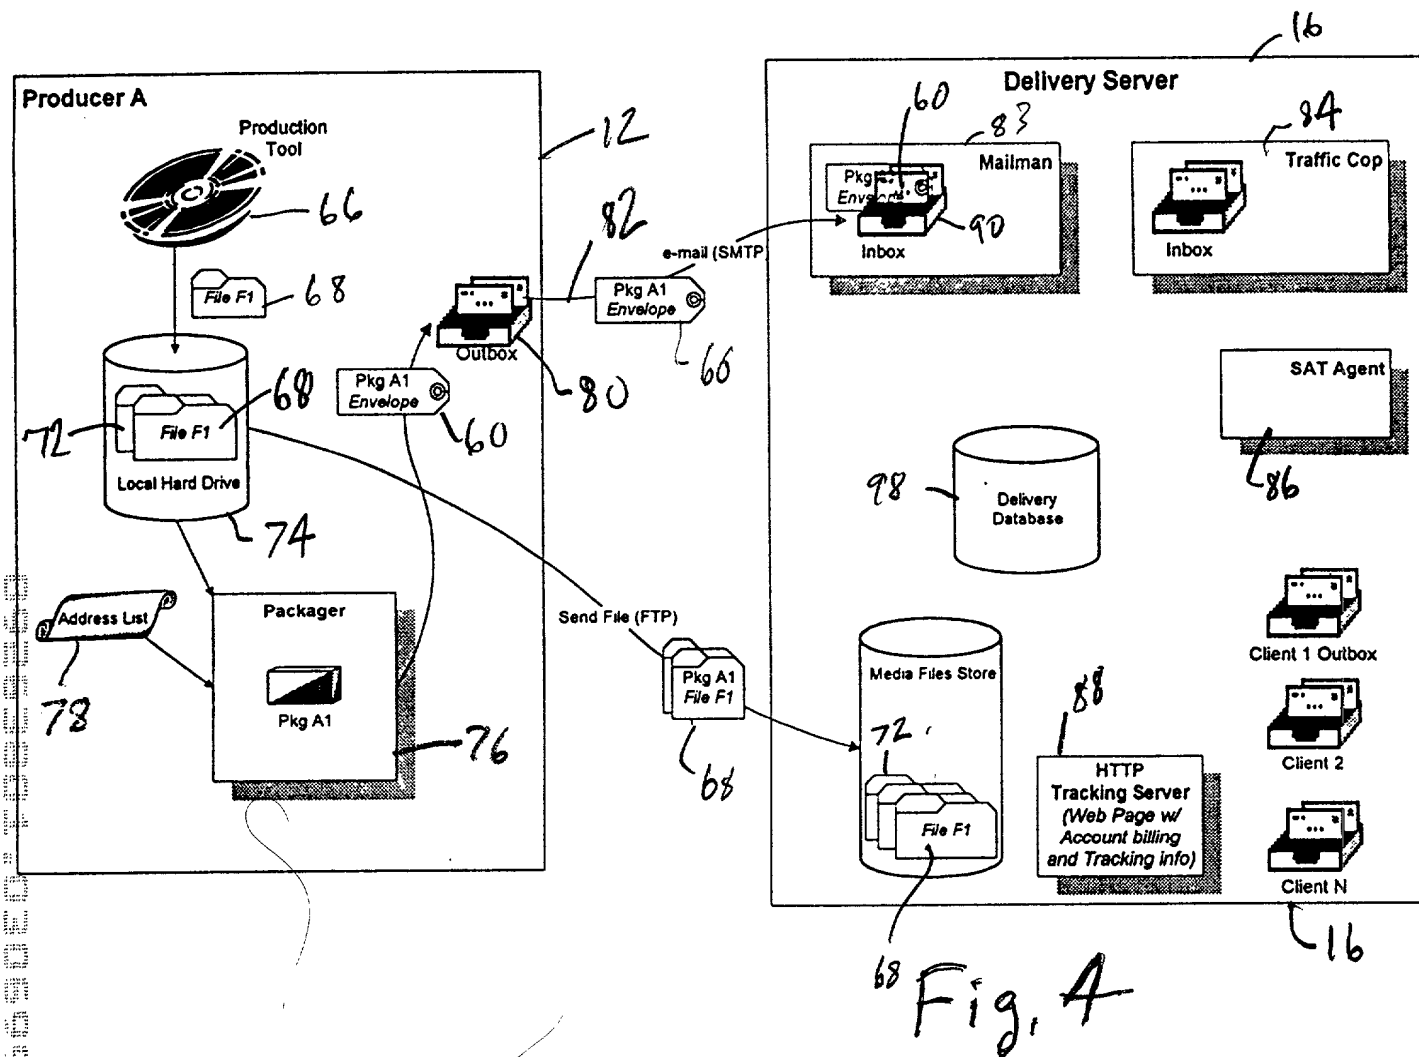


Fig. 3




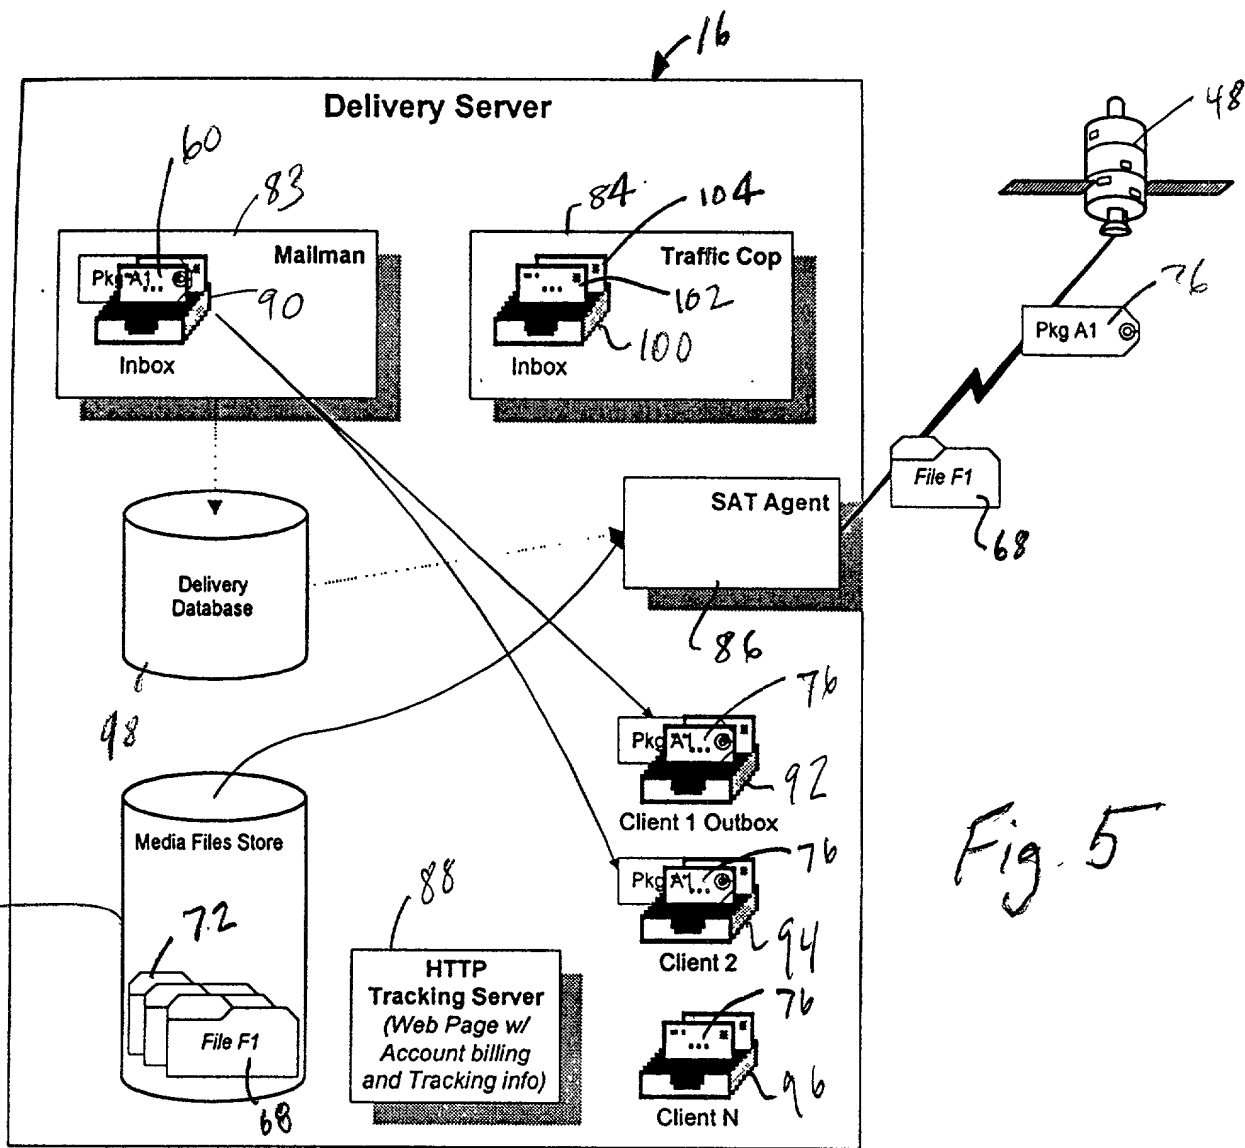


Fig. 5

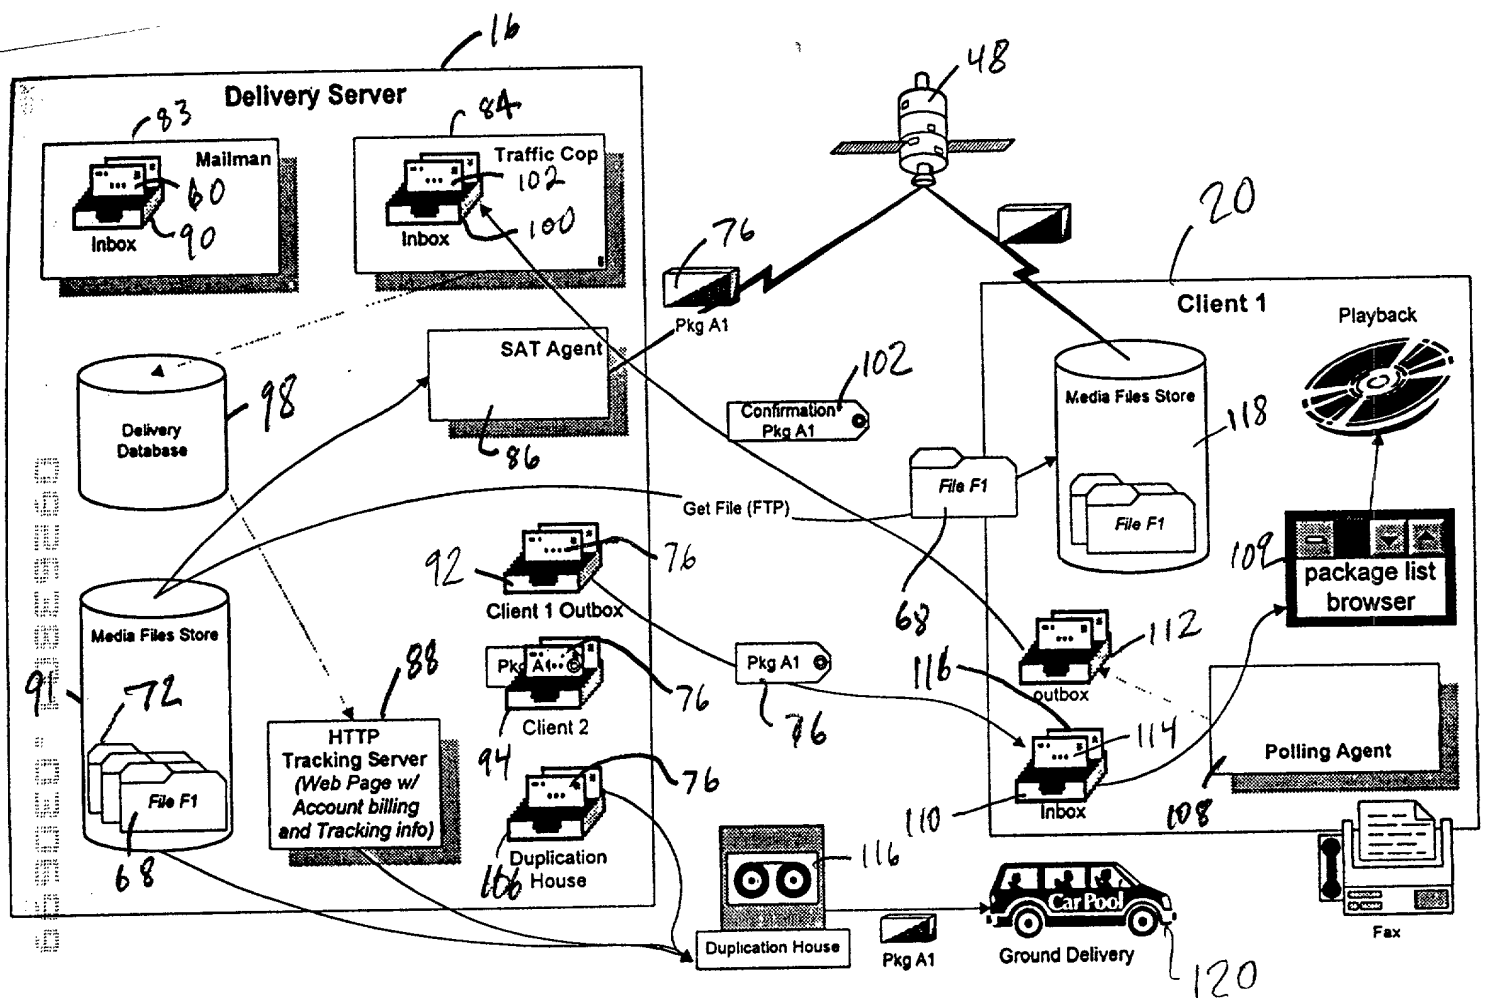

2000-07-20 10:00:00

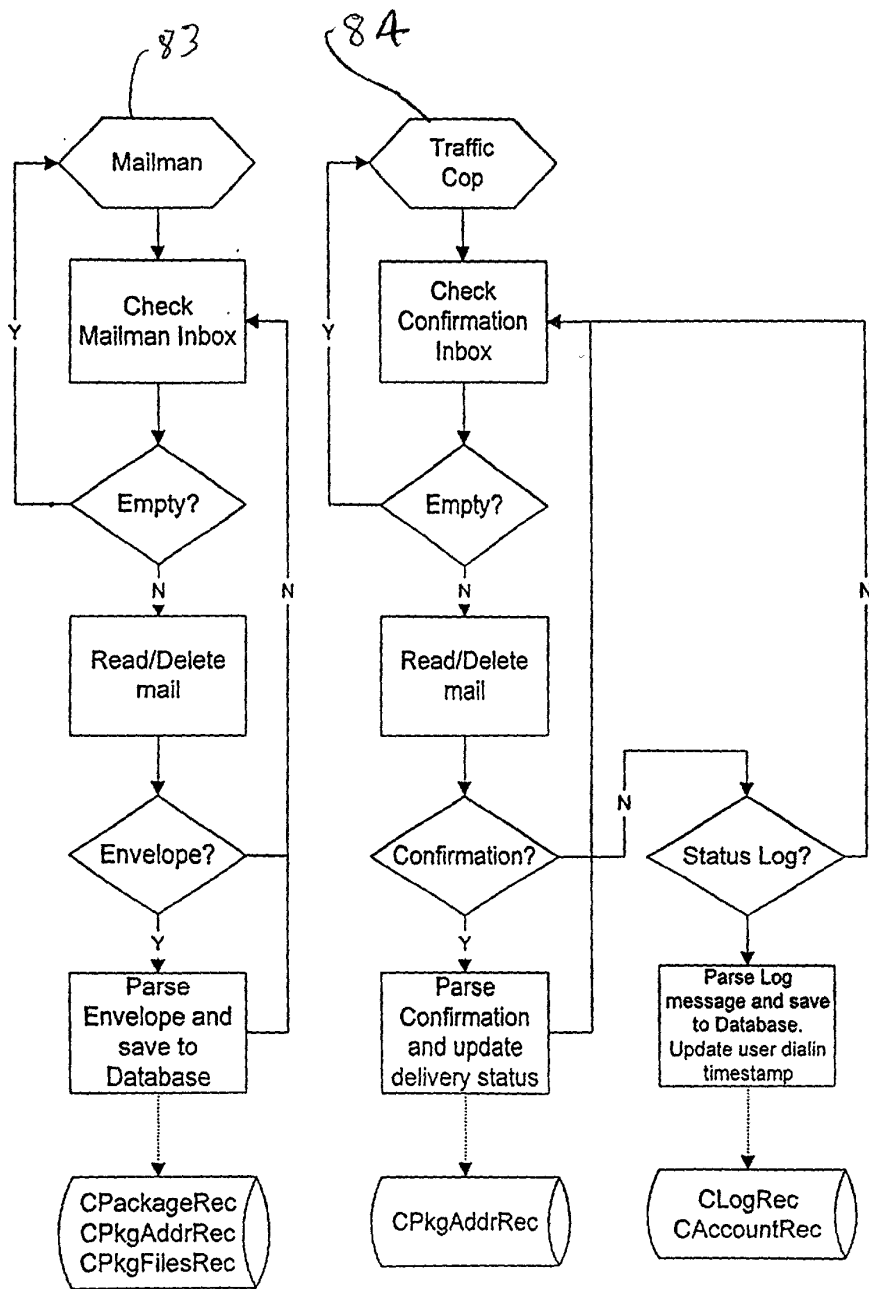


Fig. 7

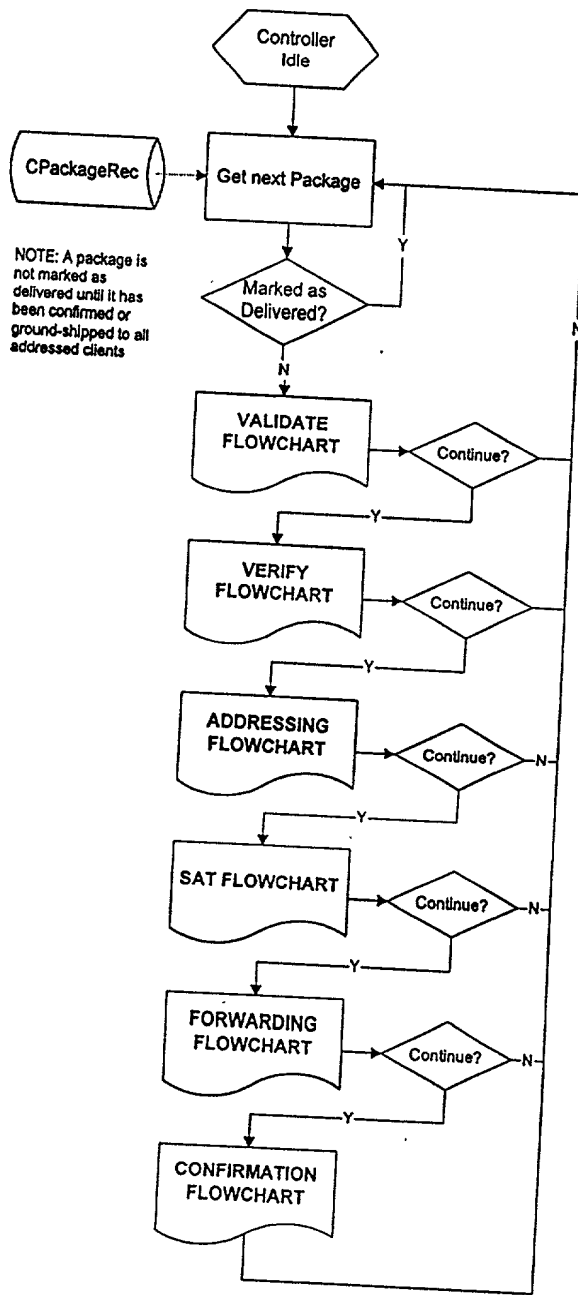


Fig. 8

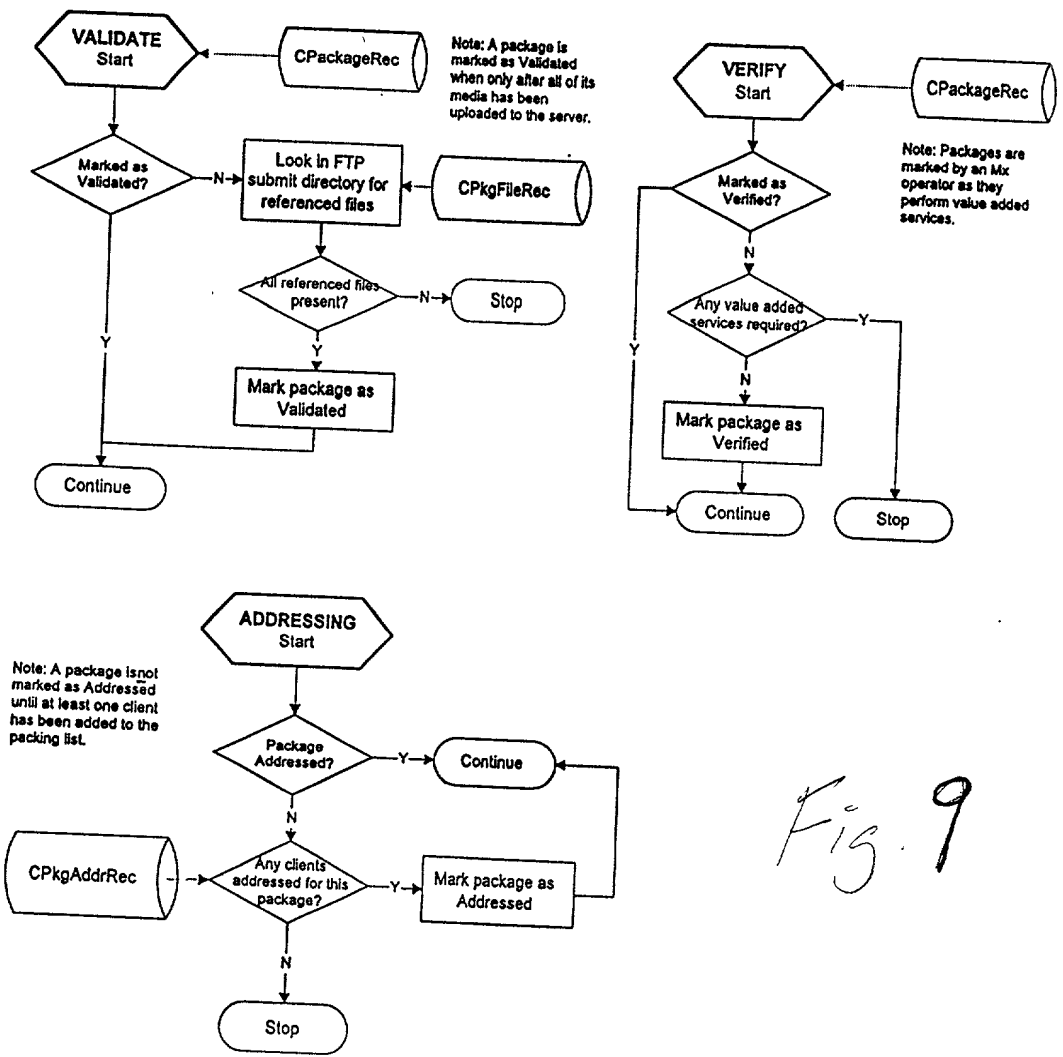


Fig. 9

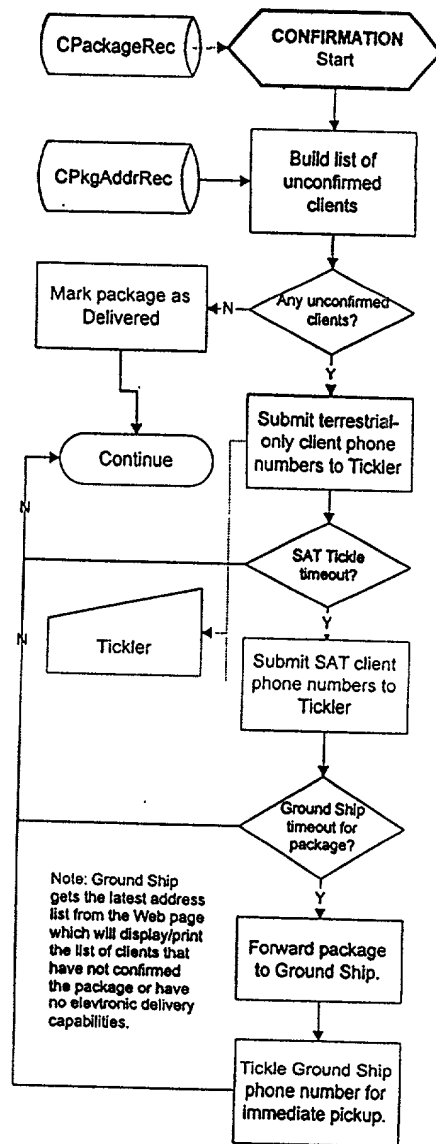
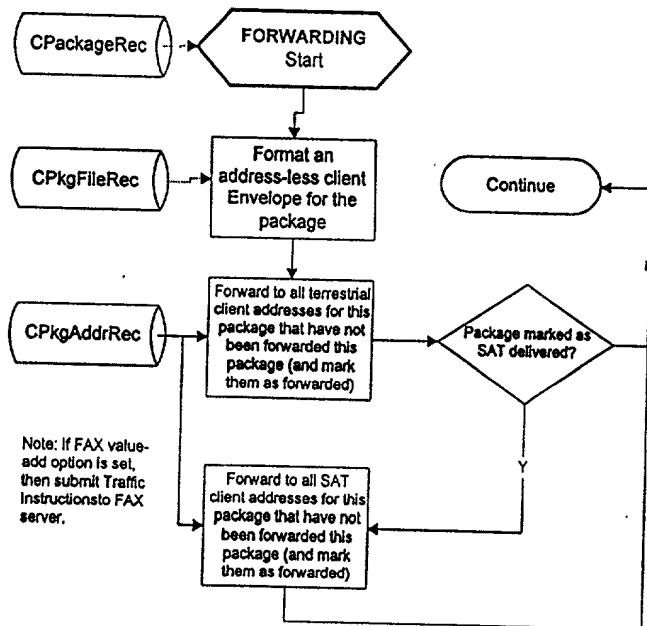
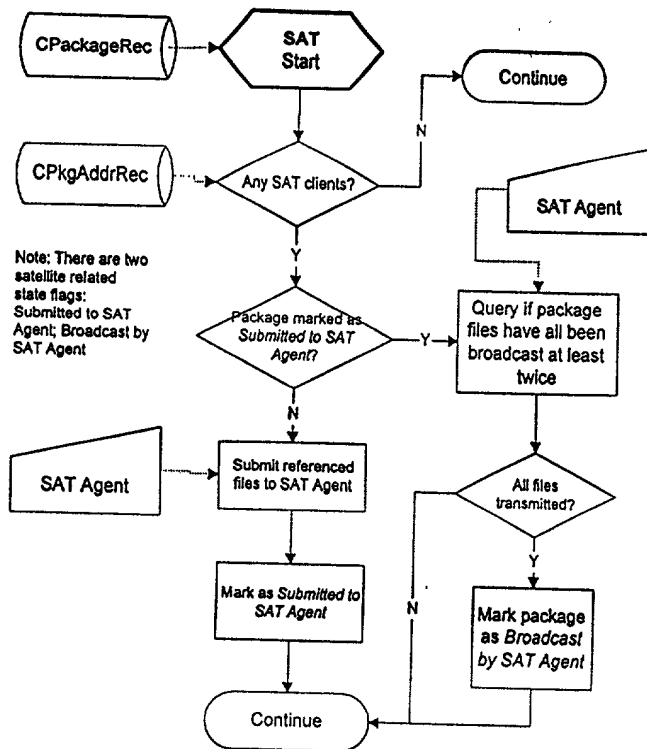
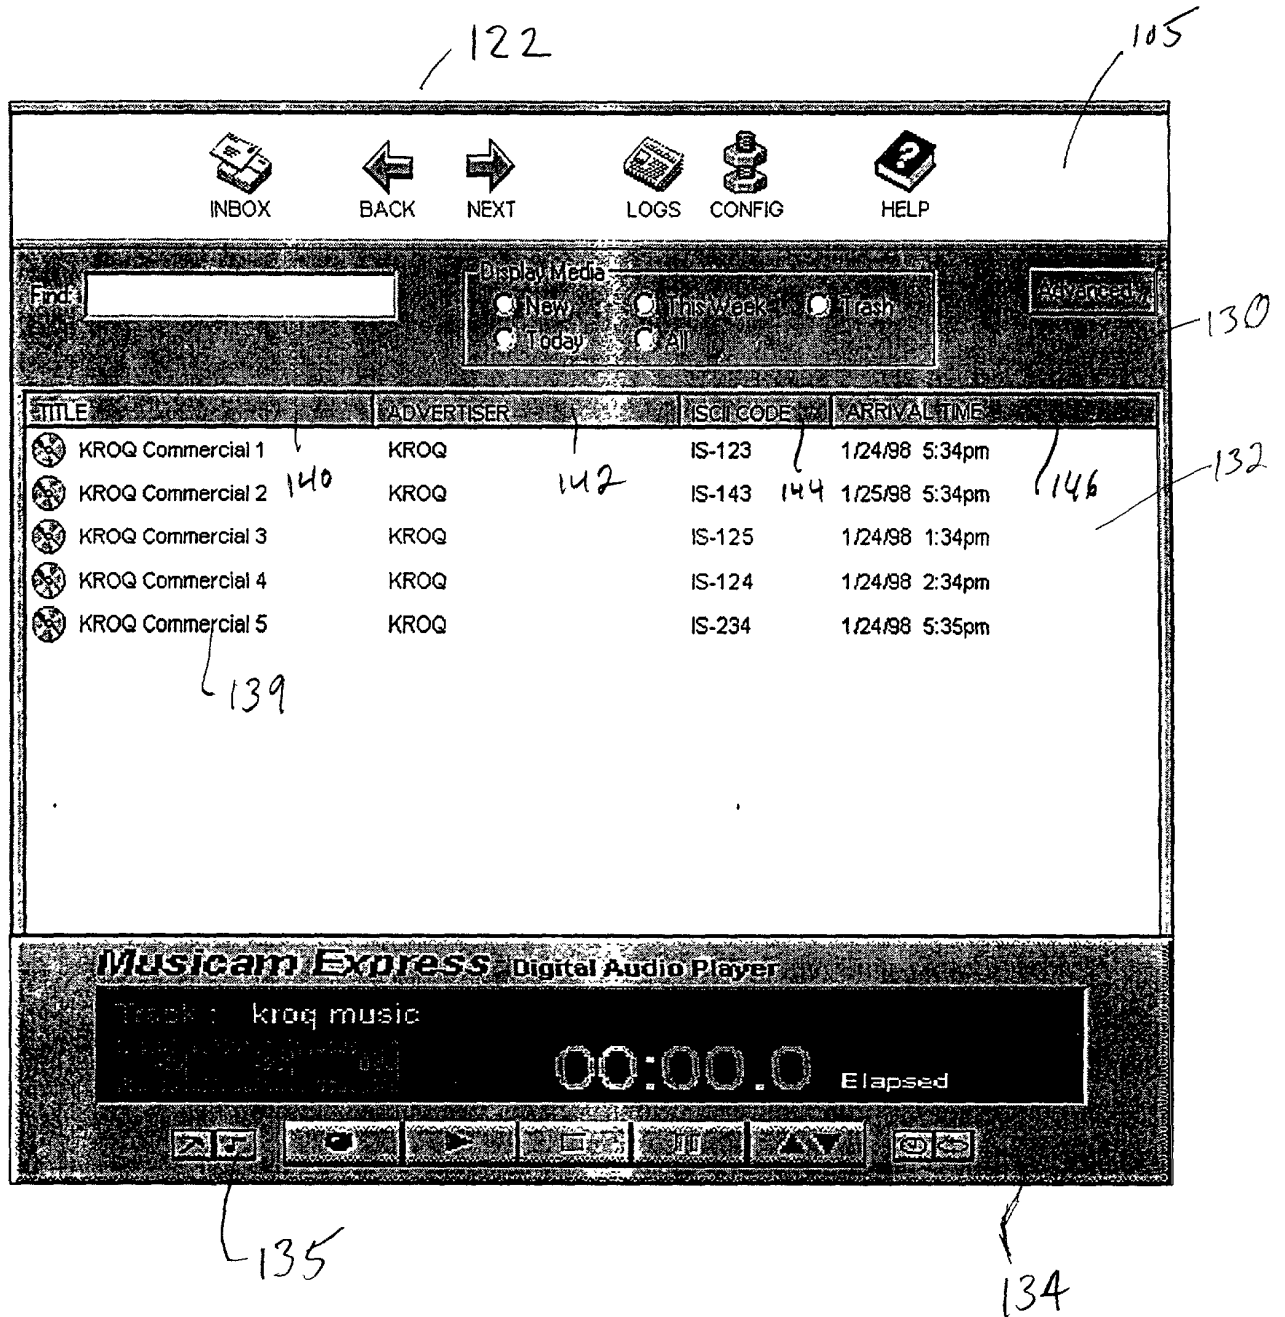


Fig. 10

Fig. 11



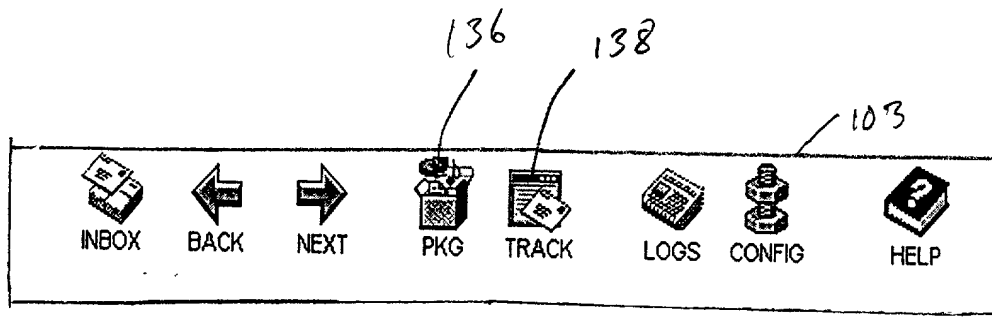


Fig. 12

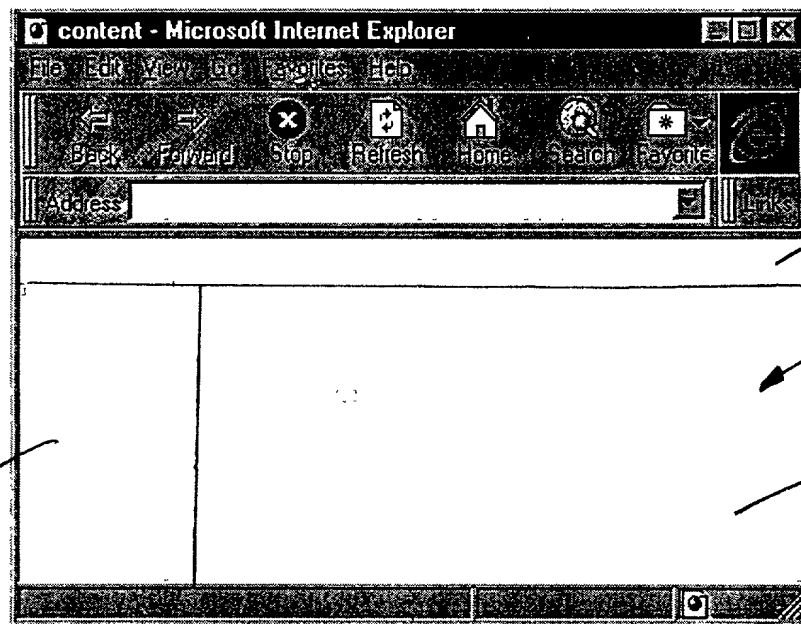


Fig. 13

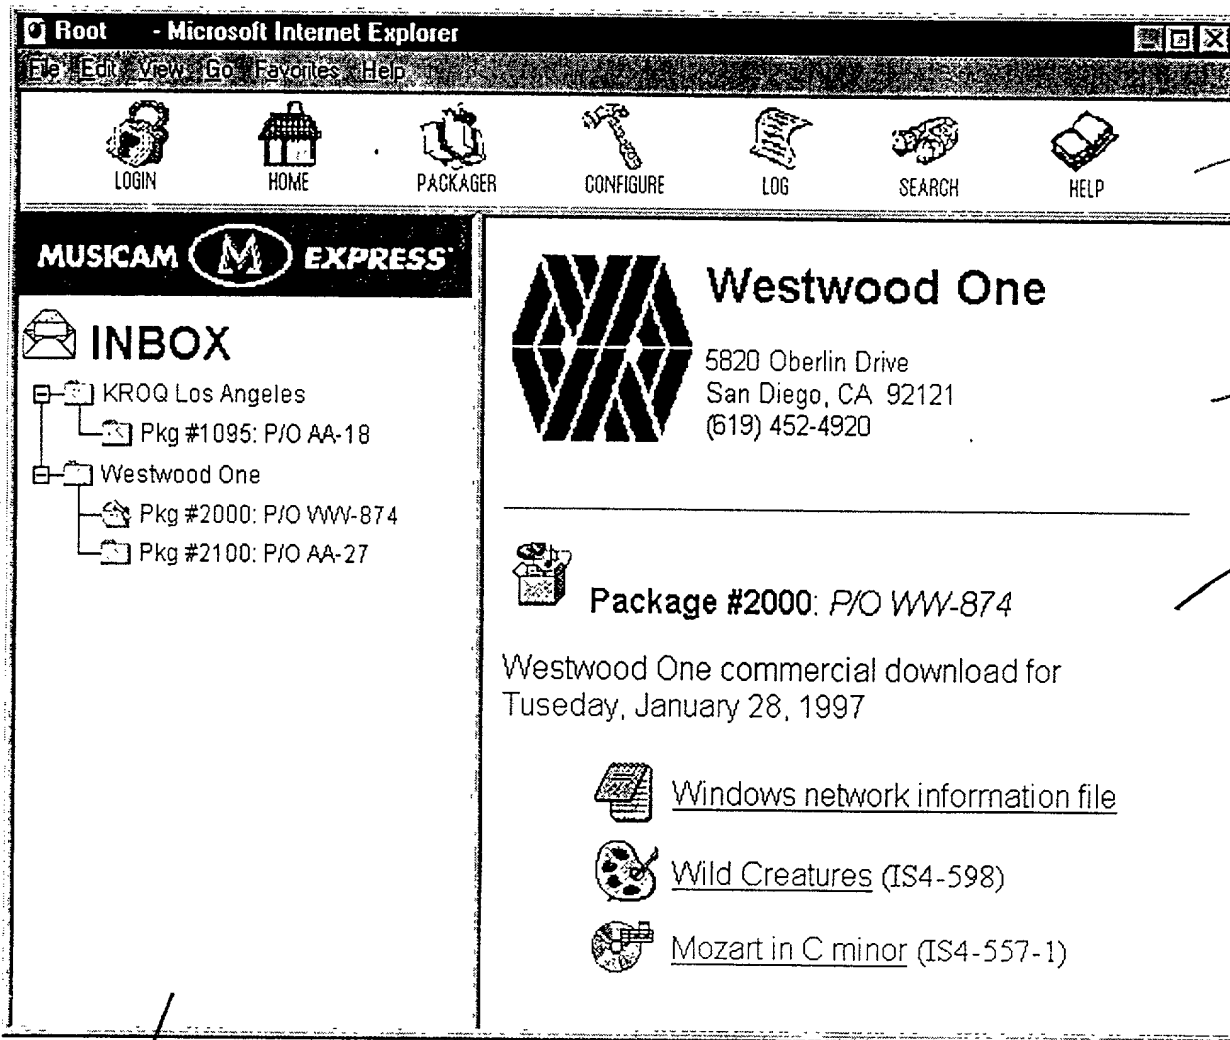



Fig. 14

Musicam Express Tracking - Microsoft Internet Explorer

File Edit View Go Favorites Help



ExpressNet Tracking

Account

Password

Package Enter Package ID or P/O (Leave blank for all packages)

Tracking Results

Click on a Package ID to see details.

	Package ID	Reference P/O	Status	Transaction Time
✓	#2000	WW-874	DELIVERED	01/28/97 14:47:28
✓	#2100	AA-27	DELIVERED	01/28/97 14:49:08

Fig. 16

Fig. 15

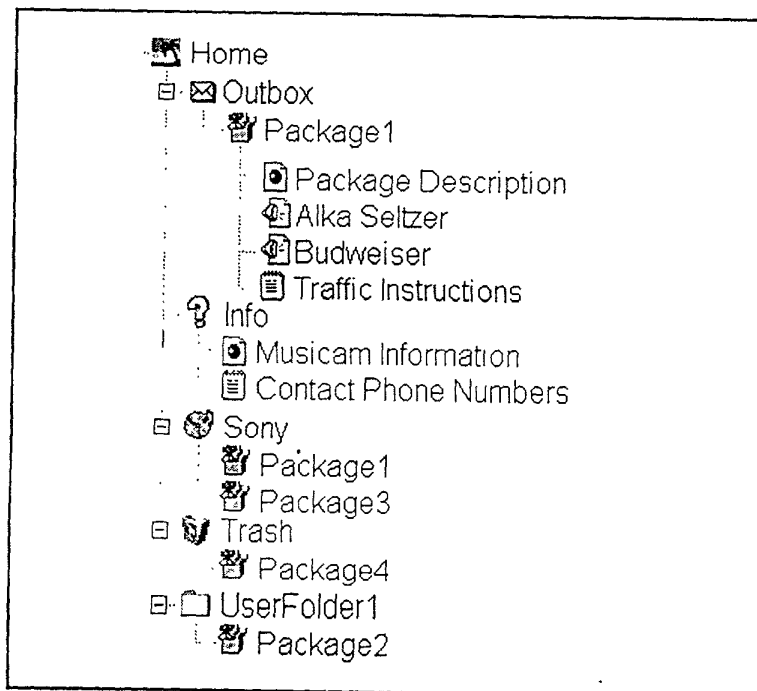


Fig. 17

172

Musicam Express Tracking - Microsoft Internet Explorer

File Edit View Go Favorites Help

Tracking Results

Click on a Package ID to see details

	Package ID	Reference P/O	Status	Transaction Time
✓	#2100	AA-27	DELIVERED	01/28/97 14:49:08

Affiliate Confirmations

	Client	Status	Transaction Time
✓	Client	DELIVERED	12/31/99 16:00:00

Package Content

Antoher Westwood One example

- Traffic Instructions
- Media Sample (154-590-1)
- Media Sample (154-55)

174

176